


Luminaire

Code M256425
 Name EVERYTHING 105 TONDO TRIM ORIENTABILE LED 3000K SPOT CORNICE BIANCO / DEFL. METALLIZZATO

Measuram.

Code FTS1602298
 Name EVERYTHING 105 TONDO TRIM ORIENTABILE LED 3000K SPOT CORNICE BIANCO / DEFL. METALLIZZATO

Luminaire Flux	1066.13 lm	Luminaire Power	13.00 W	Efficacy	82.01 lm/W	Efficiency	100.00%
Lamps Flux	1066.13 lm	Maximum value	4067.46 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 105 mm Diam. 50 mm	Height	115 mm	Height	0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001963 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000475 m2				
Coordinate system	CG	Symmetry Type	Rotosymmetrical				
Date	03-07-2015	Maximum Gamma Angle	180				
Measurement Distance	0.00	Measurement Flux	1066.13 lm				
LED Flux=1390lm LED Power=13W Eff=76,7% EfcLed=107lm/W EfcLum=82lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	98 100 100 100 100	D DIN 5040	A60				
F UTE	--	B NBN	BZ 1				

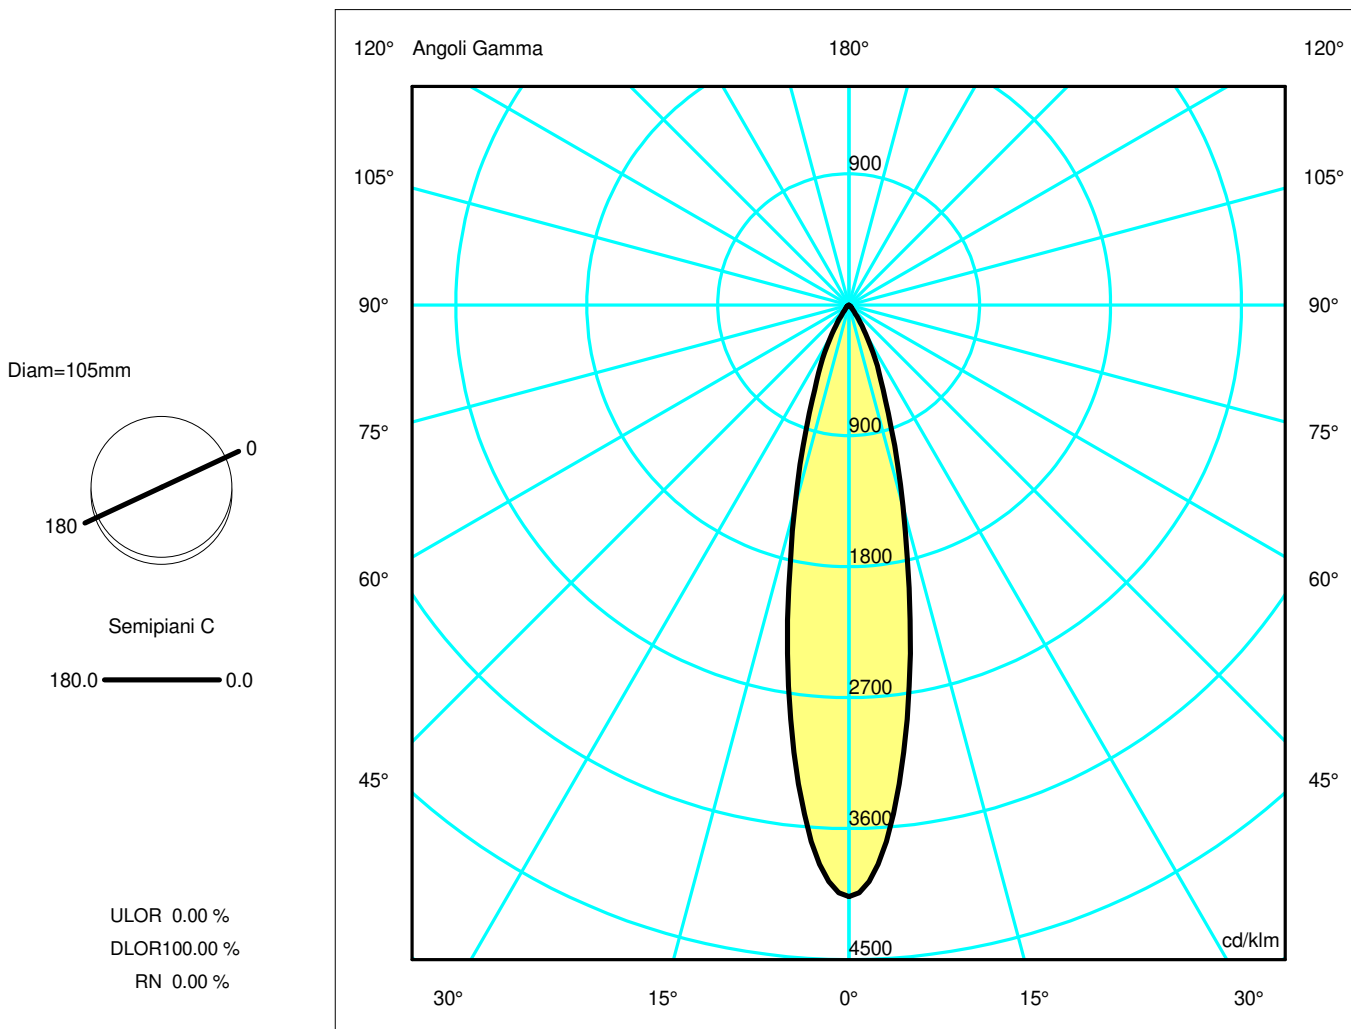

Luminaire

Code M256425
Name EVERYTHING 105 TONDO TRIM ORIENTABILE LED 3000K SPOT CORNICE BIANCO / DEFL. METALLIZZATO

Measur.


Code FTS1602298
Name EVERYTHING 105 TONDO TRIM ORIENTABILE LED 3000K SPOT CORNICE BIANCO / DEFL. METALLIZZATO

Luminaire Flux	1066.13 lm	Luminaire Power	13.00 W	Efficacy	82.01 lm/W	Efficiency	100.00%
Lamps Flux	1066.13 lm	Maximum value	4067.46 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	105 mm 50 mm	Height Height	115 mm 0 mm		
Horizontal Luminous Area	0.001963 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.000475 m2		
Coordinate system	CG			Symmetry Type	Rotosymmetrical		
Date	03-07-2015			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	1066.13 lm		
LED Flux=1390lm LED Power=13W Eff=76,7% EfcLed=107lm/W EfcLum=82lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	98 100 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.21	0.42	0.63	0.84	1.04	OC	0.21	0.42	0.63	0.84	1.04
OB	0.21	0.42	0.63	0.84	1.04	OD	0.21	0.42	0.63	0.84	1.04

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	4336.45	3743.37	1530.88	493.22	101.95	24.49	0.55	0.31	0.25	0.23
OB	4336.45	3743.37	1530.88	493.22	101.95	24.49	0.55	0.31	0.25	0.23
OC	4336.45	3743.37	1530.88	493.22	101.95	24.49	0.55	0.31	0.25	0.23
OD	4336.45	3743.37	1530.88	493.22	101.95	24.49	0.55	0.31	0.25	0.23

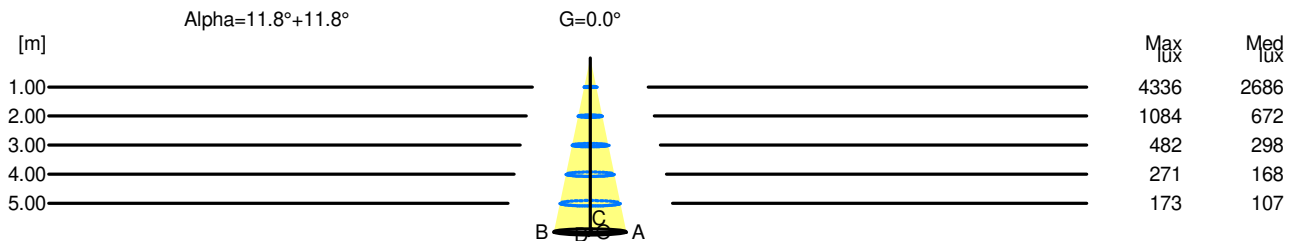

H[m]	D[m]	Max lux	Med lux	Alpha=11.8°+11.8°	G=0.0
1.00	0.42	4336	2686		
2.00	0.84	1084	672		
3.00	1.25	482	298		
4.00	1.67	271	168		
5.00	2.09	173	107		