


## Luminaire

Code M256025  
Name EVERYTHING 105 TONDO TRIM ORIENTABILE LED 3000K FLOOD CORNICE BIANCO / DEFL. NERO

## Measurerm.

Code FTS1602328  
Name EVERYTHING 105 TONDO TRIM ORIENTABILE LED 3000K FLOOD CORNICE BIANCO / DEFL. NERO

Luminaire Flux	854.85 lm	Luminaire Power	13.00 W	Efficacy	65.76 lm/W	Efficiency	100.00%
Lamps Flux	854.85 lm	Maximum value	3263.81 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam.	105 mm	Height	115 mm		
		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area	0.001963 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.000475 m2		
Coordinate system	CG			Symmetry Type	Rotosymmetrical		
Date	01-07-2015			Maximum Gamma Angle	90		
Measurement Distance	0.00			Measurement Flux	854.85 lm		
LED Flux=1390lm LED Power=13W Eff=61,5% EfcLed=107lm/W EfcLum=66lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	98 100 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

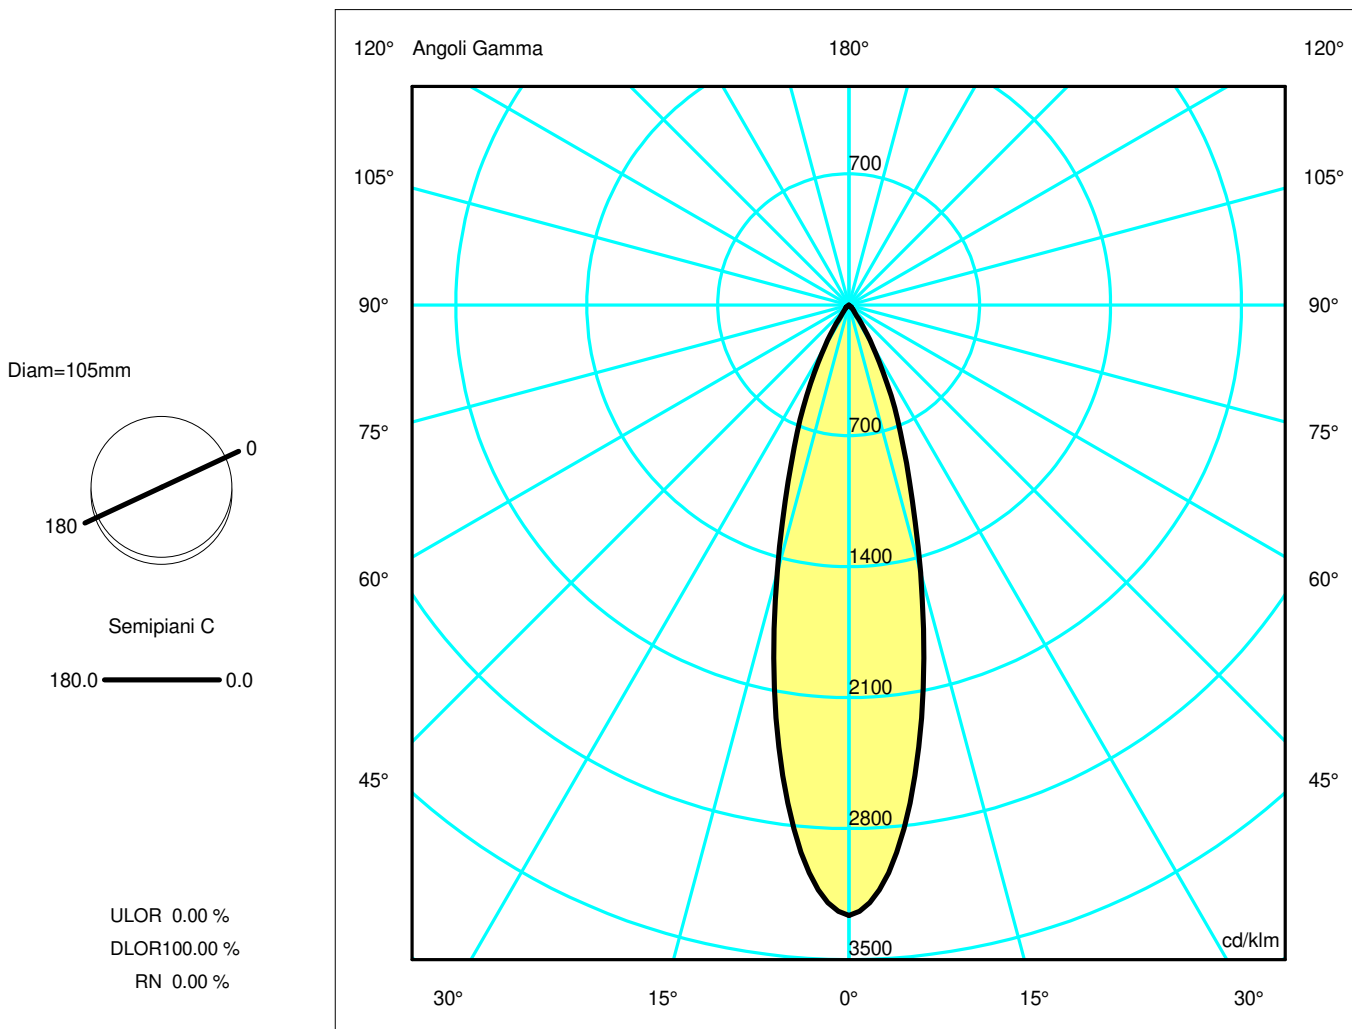

## Luminaire

Code M256025  
Name EVERYTHING 105 TONDO TRIM ORIENTABILE LED 3000K FLOOD CORNICE BIANCO / DEFL. NERO

## Measurement


Code FTS1602328  
Name EVERYTHING 105 TONDO TRIM ORIENTABILE LED 3000K FLOOD CORNICE BIANCO / DEFL. NERO

Luminaire Flux	854.85 lm	Luminaire Power	13.00 W	Efficacy	65.76 lm/W	Efficiency	100.00%
Lamps Flux	854.85 lm	Maximum value	3263.81 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	105 mm 50 mm	Height Height	115 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.001963 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000475 m2	
Coordinate system Date Measurement Distance		CG 01-07-2015 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 90 854.85 lm	
LED Flux=1390lm LED Power=13W Eff=61,5% EfcLed=107lm/W EfcLum=66lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	98 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.50	0.75	0.99	1.24	OC	0.25	0.50	0.75	0.99	1.24
OB	0.25	0.50	0.75	0.99	1.24	OD	0.25	0.50	0.75	0.99	1.24

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2790.07	2511.10	1266.12	457.21	78.92	19.32	0.59	0.22	0.10	0.05
OB	2790.07	2511.10	1266.12	457.21	78.92	19.32	0.59	0.22	0.10	0.05
OC	2790.07	2511.10	1266.12	457.21	78.92	19.32	0.59	0.22	0.10	0.05
OD	2790.07	2511.10	1266.12	457.21	78.92	19.32	0.59	0.22	0.10	0.05

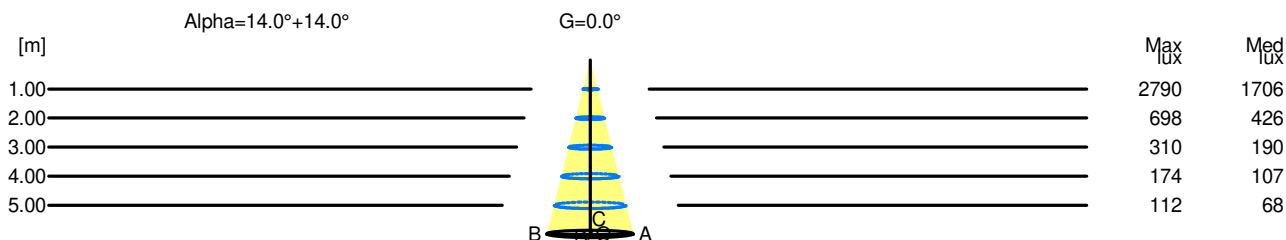

H[m]	D[m]	Max lux	Med lux	Alpha=14.0°+14.0°	G=0.0
1.00	0.50	2790	1706		
2.00	0.99	698	426		
3.00	1.49	310	190		
4.00	1.99	174	107		
5.00	2.48	112	68		