


Luminaire

Code M256620
Name EVERYTHING 105 TONDO TRIM FISSO LED 3000K FLOOD CORNICE BIANCO / DEFL. METALLIZZATO

Measuram.

Code FTS1602323
Name EVERYTHING 105 TONDO TRIM FISSO LED 3000K FLOOD CORNICE BIANCO / DEFL. METALLIZZATO

Luminaire Flux	832.61 lm	Luminaire Power	13.00 W	Efficacy	64.05 lm/W	Efficiency	100.00%
Lamps Flux	832.61 lm	Maximum value	2064.61 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	105 mm 50 mm	Height Height	115 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.001963 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000475 m2	
Coordinate system Date Measurement Distance		CG 07-07-2015 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 832.61 lm	
LED Flux=1390lm LED Power=13W Eff=59,9% EfcLed=107lm/W EfcLum=64lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	96 100 100 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

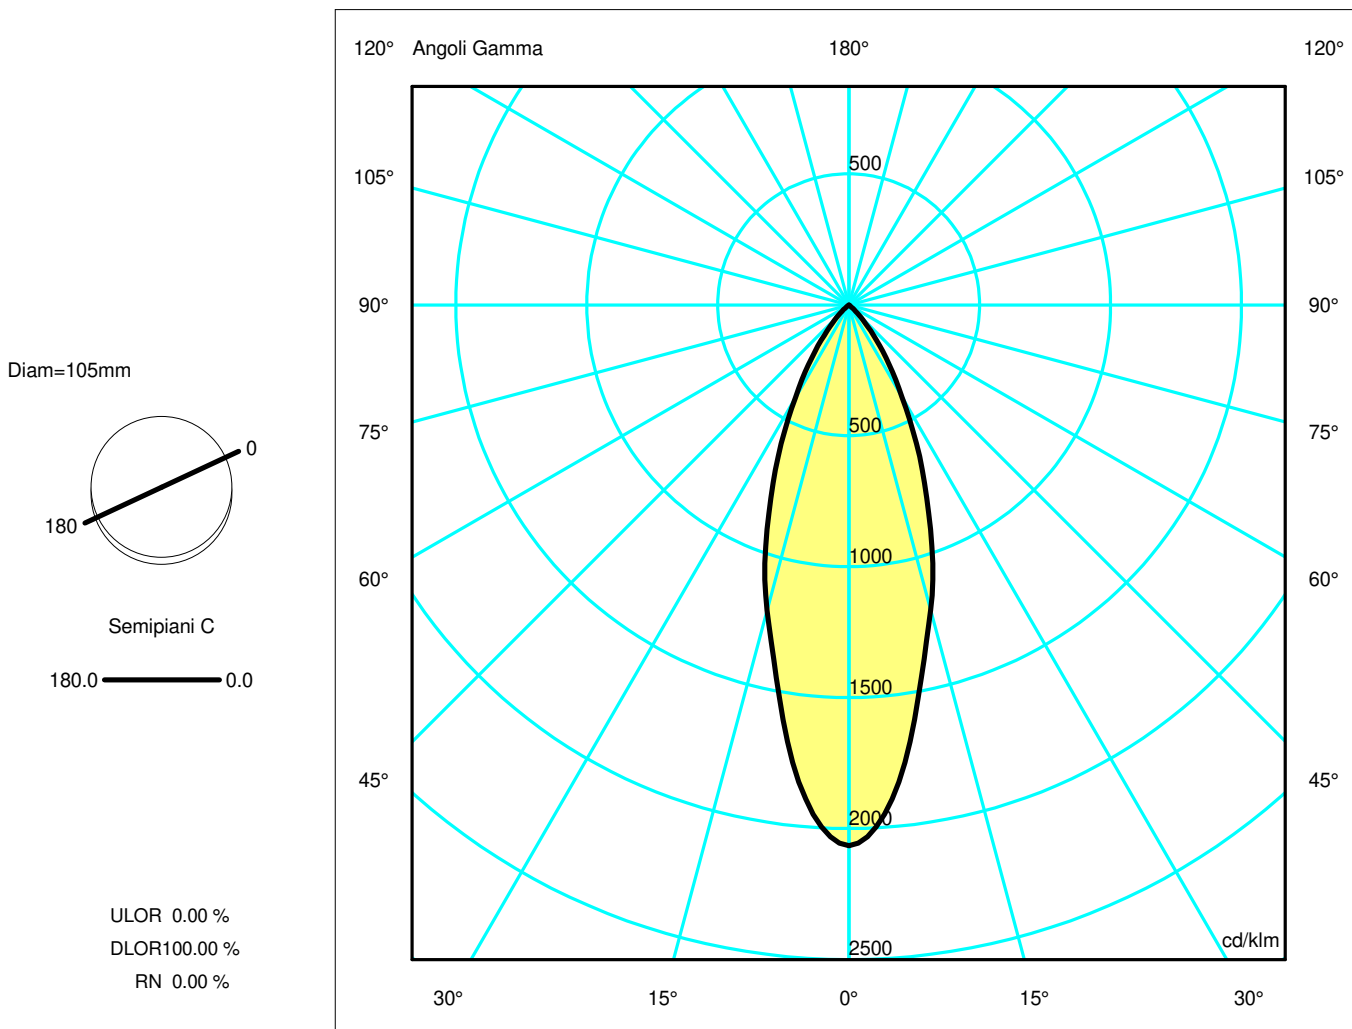

Luminaire

Code M256620
Name EVERYTHING 105 TONDO TRIM FISSO LED 3000K FLOOD CORNICE BIANCO / DEFL. METALLIZZATO

Measur.


Code FTS1602323
Name EVERYTHING 105 TONDO TRIM FISSO LED 3000K FLOOD CORNICE BIANCO / DEFL. METALLIZZATO

Luminaire Flux	832.61 lm	Luminaire Power	13.00 W	Efficacy	64.05 lm/W	Efficiency	100.00%
Lamps Flux	832.61 lm	Maximum value	2064.61 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	105 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area	0.001963 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.000475 m2		
Coordinate system	CG	Symmetry Type		Maximum Gamma Angle	180		Rotosymmetrical
Date	07-07-2015	Measurement Flux			832.61 lm		
Measurement Distance	0.00						
LED Flux=1390lm LED Power=13W Eff=59,9% EfcLed=107lm/W EfcLum=64lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	96 100 100 100 100	D DIN 5040		A60			
F UTE	1.00 A	B NBN		BZ 1			

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.33	0.65	0.98	1.31	1.63	OC	0.33	0.65	0.98	1.31	1.63
OB	0.33	0.65	0.98	1.31	1.63	OD	0.33	0.65	0.98	1.31	1.63

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1719.02	1576.43	1005.10	532.10	205.92	46.40	0.98	0.46	0.31	0.25
OB	1719.02	1576.43	1005.10	532.10	205.92	46.40	0.98	0.46	0.31	0.25
OC	1719.02	1576.43	1005.10	532.10	205.92	46.40	0.98	0.46	0.31	0.25
OD	1719.02	1576.43	1005.10	532.10	205.92	46.40	0.98	0.46	0.31	0.25

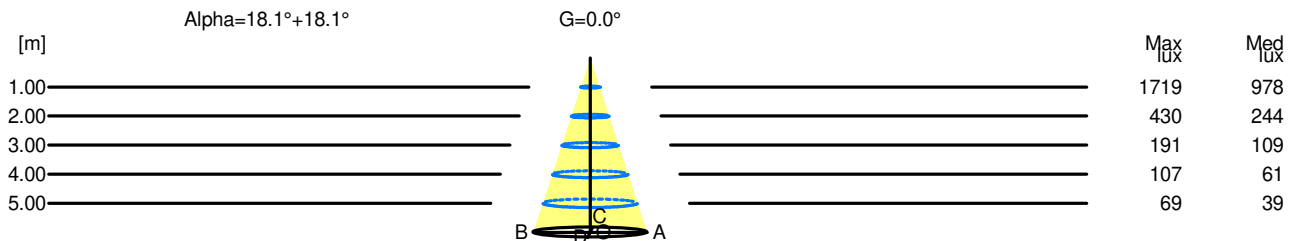

H[m]	D[m]	Max lux	Med lux	Alpha=18.1°+18.1°	G=0.0
1.00	0.65	1719	978		
2.00	1.31	430	244		
3.00	1.96	191	109		
4.00	2.61	107	61		
5.00	3.27	69	39		