


Luminaire

Code NL4204134Y004
 Name Everything 55 700mA round 34° - cornice nera - 2700K

Measurement

Code FTS1602965
 Name Everything 55 700mA round 34° - cornice nera - 2700K

Luminaire Flux	566.00 lm	Luminaire Power	8.50 W	Efficacy	66.59 lm/W	Efficiency	100.00%
Lamps Flux	566.00 lm	Maximum value	2862.06 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	55 mm 35 mm	Height Height	78 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.000962 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000233 m2	
Coordinate system Date Measurement Distance		CG 16-02-2015 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 90 566.00 lm	
LED Flux=755lm LED Power=8,5W Eff=75% EfcLed=89lm/W EfcLum=67lm/W CCT=2700K Ra=80 SDCM=2 L70(6K)=51400h							
C.I.E. F UTE	100 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

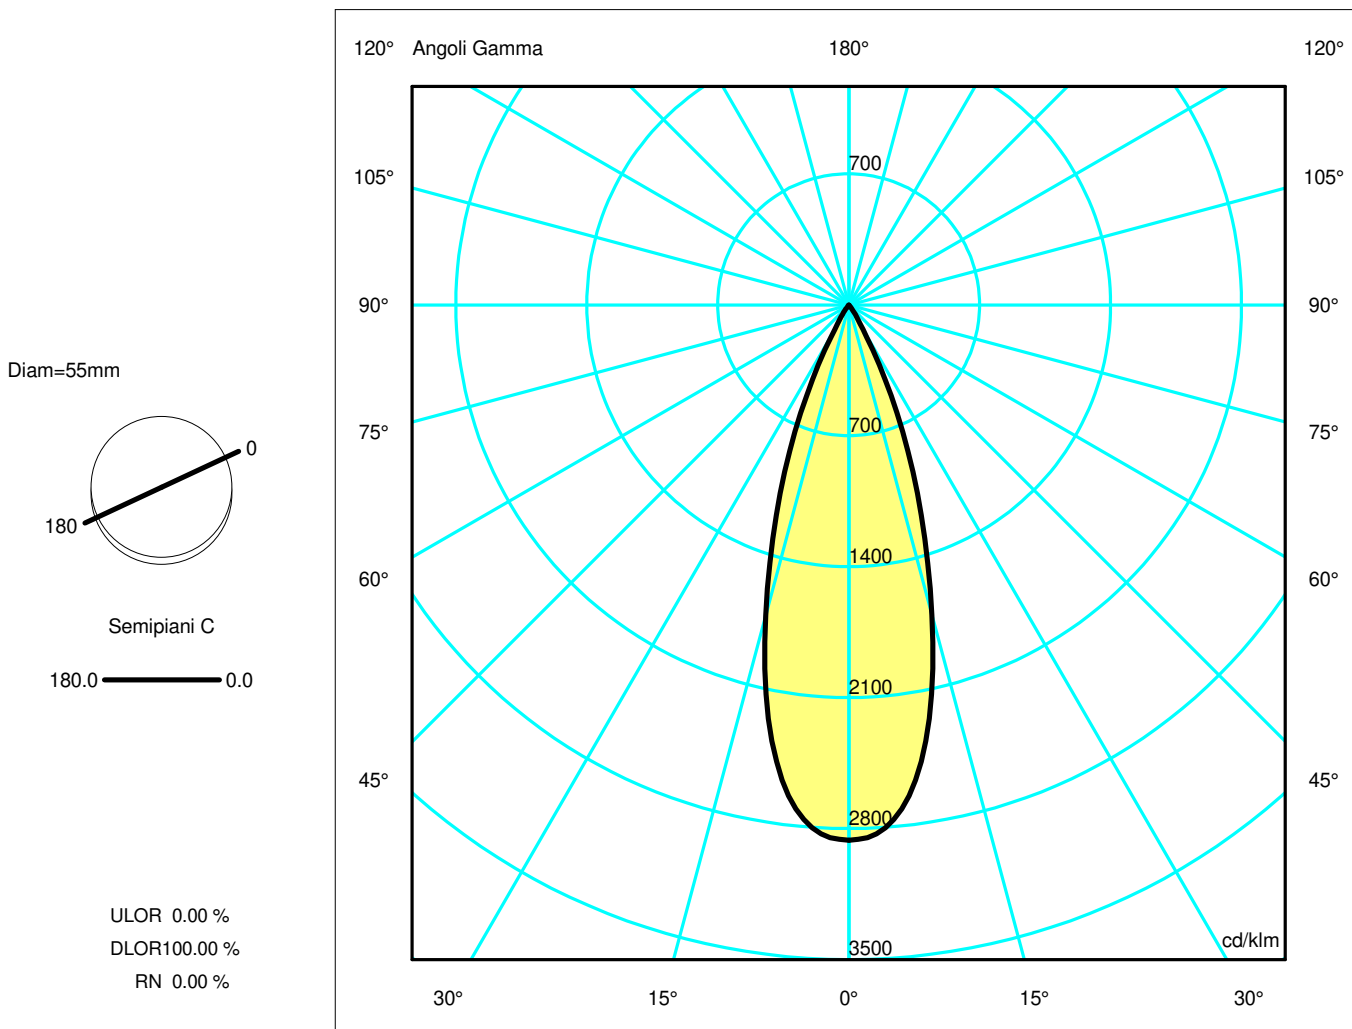

Luminaire

Code NL4204134Y004
Name Everything 55 700mA round 34° - cornice nera - 2700K

Measurement

Code FTS1602965
Name Everything 55 700mA round 34° - cornice nera - 2700K

Luminaire Flux	566.00 lm	Luminaire Power	8.50 W	Efficacy	66.59 lm/W	Efficiency	100.00%
Lamps Flux	566.00 lm	Maximum value	2862.06 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam.	55 mm	Height	78 mm		
		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area	0.000962 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.000233 m2		
Coordinate system	CG			Symmetry Type	Rotosymmetrical		
Date	16-02-2015			Maximum Gamma Angle	90		
Measurement Distance	0.00			Measurement Flux	566.00 lm		


LED Flux=755lm LED Power=8,5W Eff=75% EfcLed=89lm/W EfcLum=67lm/W CCT=2700K Ra=80 SDCM=2 L70(6K)=51400h

C.I.E.	100	100	100	100		D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.31	0.62	0.92	1.23	1.54	OC	0.31	0.62	0.92	1.23	1.54
OB	0.31	0.62	0.92	1.23	1.54	OD	0.31	0.62	0.92	1.23	1.54

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1619.92	1562.82	971.98	302.72	27.36	0.33	0.00	0.00	0.00	0.00
OB	1619.92	1562.82	971.98	302.72	27.36	0.33	0.00	0.00	0.00	0.00
OC	1619.92	1562.82	971.98	302.72	27.36	0.33	0.00	0.00	0.00	0.00
OD	1619.92	1562.82	971.98	302.72	27.36	0.33	0.00	0.00	0.00	0.00

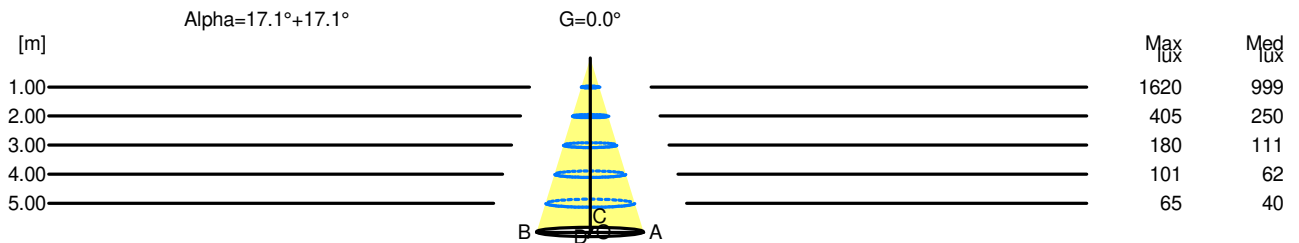

H[m]	D[m]	Max lux	Med lux	Alpha=17.1°+17.1°	G=0.0
1.00	0.62	1620	999		
2.00	1.23	405	250		
3.00	1.85	180	111		
4.00	2.46	101	62		
5.00	3.08	65	40		