


Luminaire

Code M328160
 Name EVERYTHING 105 TONDO TRIM FISSO LED 2700K SPOT CORNICE SILVER / DEFL. NERO

Measuram.

Code FTS1602770
 Name EVERYTHING 105 TONDO TRIM FISSO LED 2700K SPOT CORNICE SILVER / DEFL. NERO

Luminaire Flux	820.61 lm	Luminaire Power	13.00 W	Efficacy	63.12 lm/W	Efficiency	100.00%
Lamps Flux	820.61 lm	Maximum value	3737.98 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	105 mm 50 mm	Height Height	115 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.001963 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000475 m2	
Coordinate system Date Measurement Distance		CG 09-04-2015 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 90 820.61 lm	
LED Flux=1330lm LED Power=13W Eff=61,7% EfcLed=102lm/W EfcLum=63lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	100 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

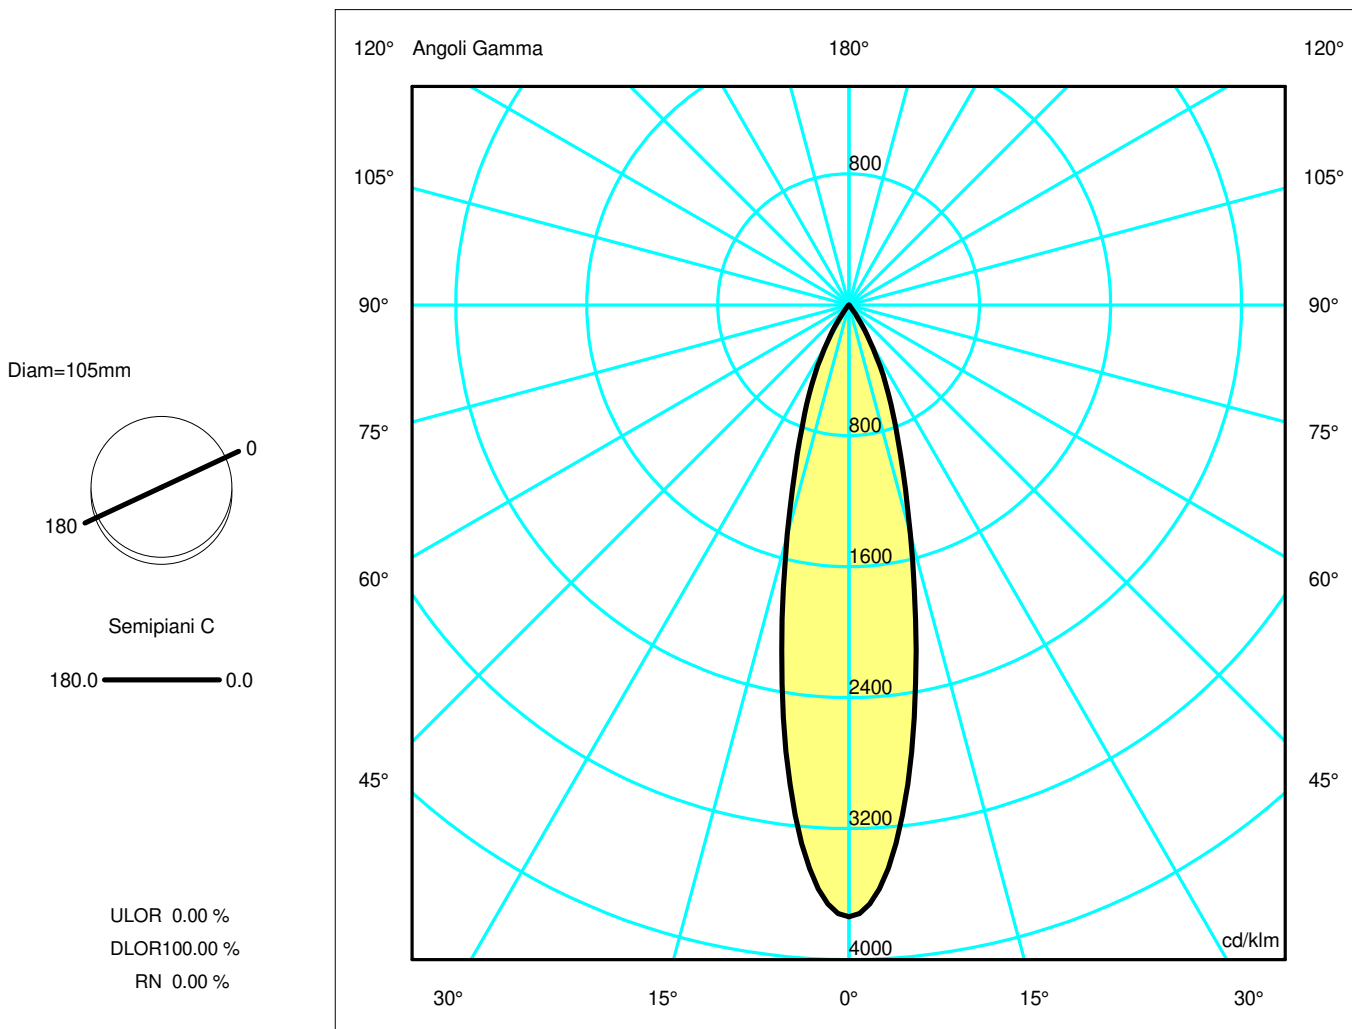

Luminaire

Code M328160
Name EVERYTHING 105 TONDO TRIM FISSO LED 2700K SPOT CORNICE SILVER / DEFL. NERO

Measurerm.


Code FTS1602770
Name EVERYTHING 105 TONDO TRIM FISSO LED 2700K SPOT CORNICE SILVER / DEFL. NERO

Luminaire Flux	820.61 lm	Luminaire Power	13.00 W	Efficacy	63.12 lm/W	Efficiency	100.00%
Lamps Flux	820.61 lm	Maximum value	3737.98 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	105 mm 50 mm	Height Height	115 mm 0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		09-04-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		820.61 lm	
LED Flux=1330lm LED Power=13W Eff=61,7% EfcLed=102lm/W EfcLum=63lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	100	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.22	0.44	0.67	0.89	1.11	OC	0.22	0.44	0.67	0.89	1.11
OB	0.22	0.44	0.67	0.89	1.11	OD	0.22	0.44	0.67	0.89	1.11

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3067.42	2710.49	1191.68	439.32	74.91	1.25	0.00	0.00	0.00	0.00
OB	3067.42	2710.49	1191.68	439.32	74.91	1.25	0.00	0.00	0.00	0.00
OC	3067.42	2710.49	1191.68	439.32	74.91	1.25	0.00	0.00	0.00	0.00
OD	3067.42	2710.49	1191.68	439.32	74.91	1.25	0.00	0.00	0.00	0.00

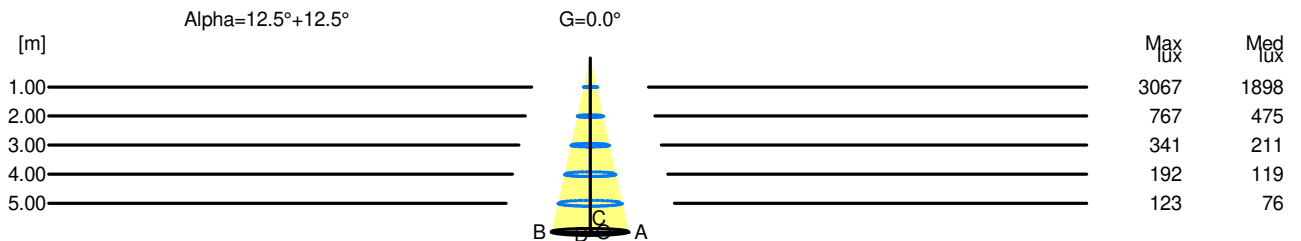

H[m]	D[m]	Max lux	Med lux	Alpha=12.5°+12.5°	G=0.0
1.00	0.44	3067	1898		
2.00	0.89	767	475		
3.00	1.33	341	211		
4.00	1.77	192	119		
5.00	2.22	123	76		