


Luminaire

Code 1104010A
Name YANZI S1

Measur.

Code FTS1702516
Name YANZI S1

| | | | | | | | |
|---|---|---|---------------|--------------|-----------------|---|-----------------|
| Luminaire Flux | 2121.59 lm | Luminaire Power | 26.00 W | Efficacy | 81.60 lm/W | Efficiency | 100.00% |
| Lamps Flux | 2121.59 lm | Maximum value | 102.21 cd/klm | Position | C=0.00 G=179.00 | CG | Rotosymmetrical |
| Round Luminaire Round Luminous Area | Diam. 100 mm Diam. 100 mm | Height | 100 mm | Height | 100 mm | | |
| Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90° | 0.007854 m2 0.010000 m2 0.010000 m2 | Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76° | | | | 0.010000 m2 0.010000 m2 0.011603 m2 | |
| Coordinate system Date Measurement Distance | CG 12-12-2017 0.00 | Symmetry Type Maximum Gamma Angle Measurement Flux | | | | Rotosymmetrical 180 2121.59 lm | |
| LED Flux=2523,3lm LED Power=24W Eff=84% EfcLed=105lm/W EfcLum=82lm/W L70(6K)=50000h | | | | | | | |
| C.I.E. F UTE | 10 33 64 38 100 -- | D DIN 5040 B NBN | | D12 BZ 10 | | | |

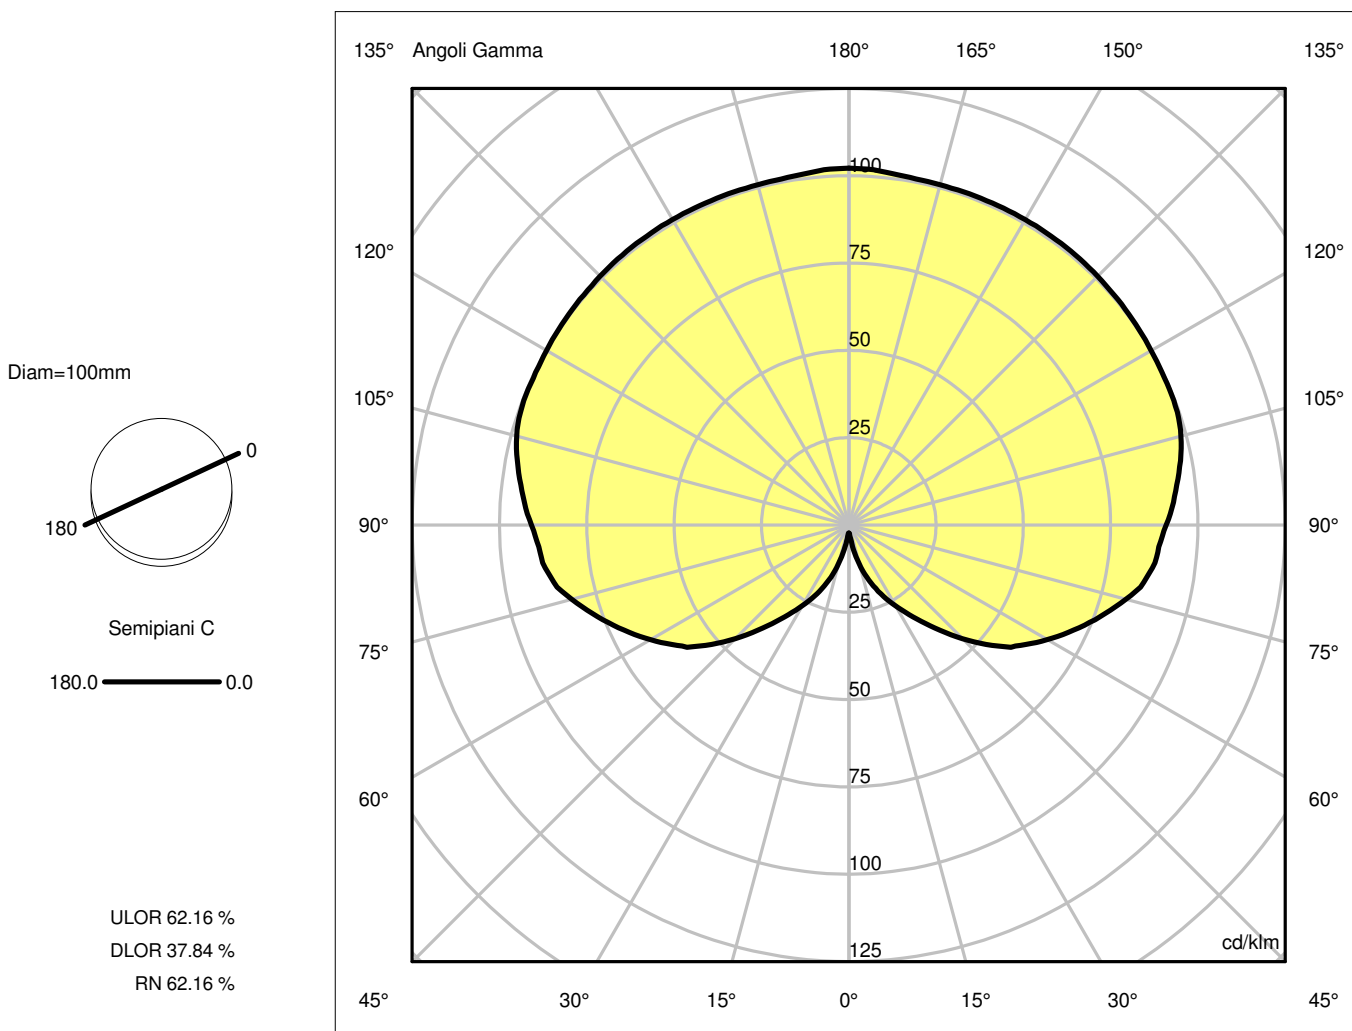

Luminaire

Code 1104010A

Name YANZI S1

Measur.

Code FTS1702516

Name YANZI S1

| | | | | | | | |
|---|-----------------|-----------------|------------------|-----------------------------|------------------|-----------------|-----------------|
| Luminaire Flux | 2121.59 lm | Luminaire Power | 26.00 W | Efficacy | 81.60 lm/W | Efficiency | 100.00% |
| Lamps Flux | 2121.59 lm | Maximum value | 102.21 cd/klm | Position | C=0.00 G=179.00 | CG | Rotosymmetrical |
| Round Luminaire Round Luminous Area | | Diam. Diam. | 100 mm 100 mm | Height Height | 100 mm 100 mm | | |
| Horizontal Luminous Area | | 0.007854 m2 | | Emitting area on Plane 180° | | 0.010000 m2 | |
| Emitting area on Plane 0° | | 0.010000 m2 | | Emitting area on Plane 270° | | 0.010000 m2 | |
| Emitting area on Plane 90° | | 0.010000 m2 | | Glare area at 76° | | 0.011603 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 12-12-2017 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 2121.59 lm | |
| LED Flux=2523,3lm LED Power=24W Eff=84% EfcLed=105lm/W EfcLum=82lm/W L70(6K)=50000h | | | | | | | |
| C.I.E. | 10 33 64 38 100 | | | D DIN 5040 | D12 | | |
| F UTE | -- | | | B NBN | BZ 10 | | |

Apertura a destra non trovata, gamma =1

Apertura a destra non trovata, gamma =1