


## Luminaire

Code 0761W30A+0772030A  
 Name TOLOMEO MEGA LED BODY BLACK/DIMM + TOLOMEO MEGA TESSUTO NRO 420- 2700K

## Measurem.

Code FTS1701405  
 Name TOLOMEO MEGA LED BODY BLACK/DIMM + TOLOMEO MEGA TESSUTO NRO 420- 2700K

Luminaire Flux	1581.97 lm	Luminaire Power	31.00 W	Efficacy	51.03 lm/W	Efficiency	100.00%
Lamps Flux	1581.97 lm	Maximum value	510.01 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	420 mm 420 mm	Height Height	290 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.138544 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.033517 m2	
Coordinate system Date Measurement Distance		CG 22-09-2016 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 1581.97 lm	
LED Flux=2722,9lm LED Power=25,6W Eff=58% EfcLed=106lm/W EfcLum=51lm/W Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E. F UTE	74 91 98 92 100 0.92 B + 0.08 T			D DIN 5040 B NBN		A61 BZ 2	

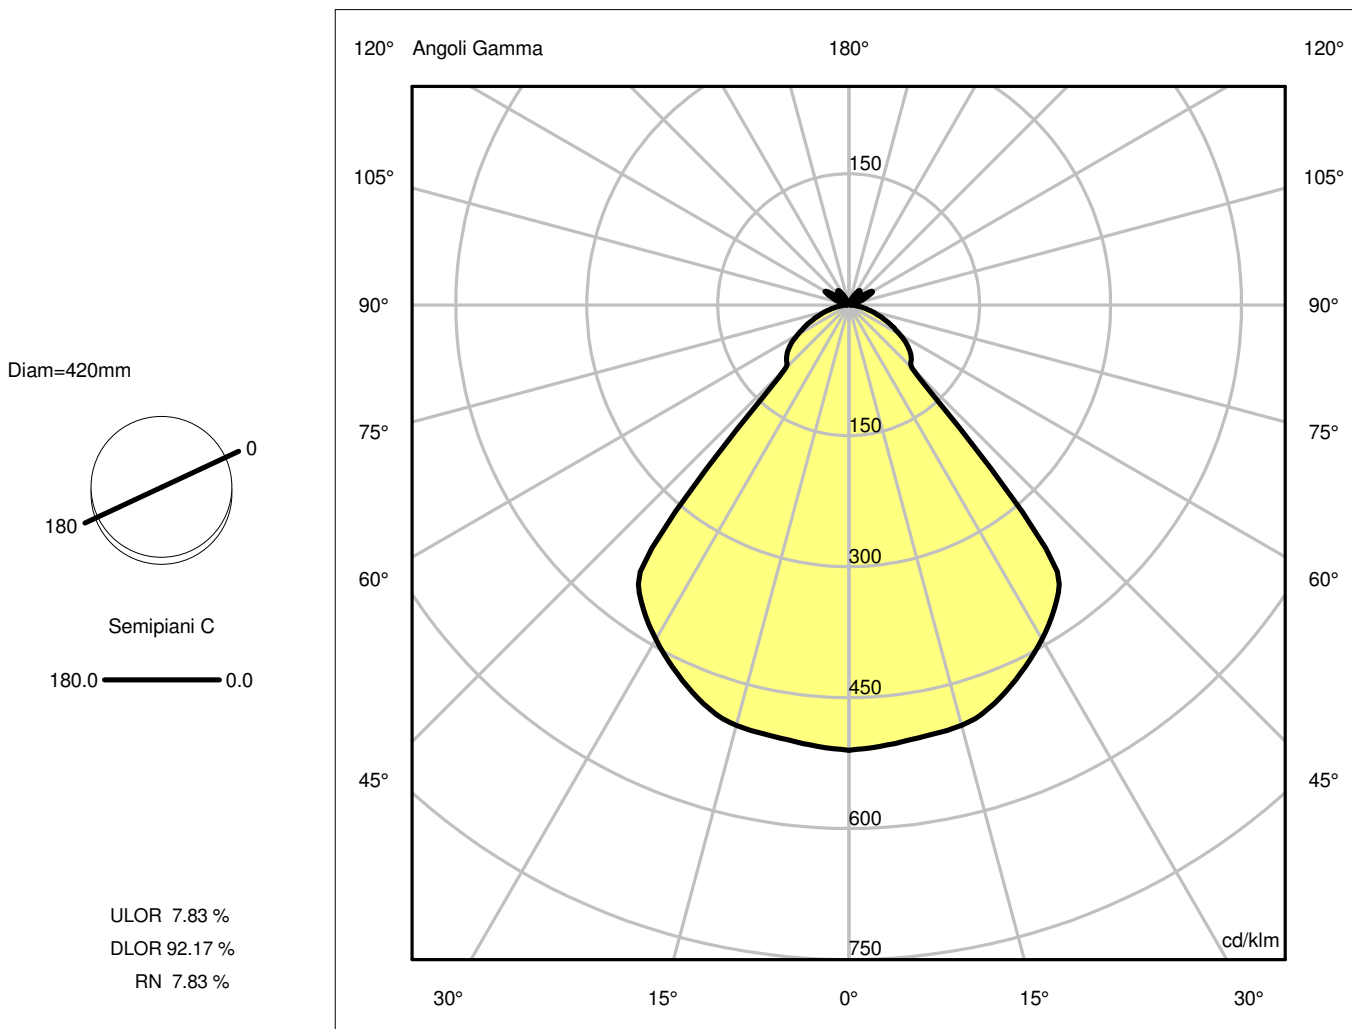

## Luminaire

Code 0761W30A+0772030A  
 Name TOLOMEO MEGA LED BODY BLACK/DIMM + TOLOMEO MEGA TESSUTO NRO 420- 2700K

## Measurerm.

Code FTS1701405  
 Name TOLOMEO MEGA LED BODY BLACK/DIMM + TOLOMEO MEGA TESSUTO NRO 420- 2700K

Luminaire Flux	1581.97 lm	Luminaire Power	31.00 W	Efficacy	51.03 lm/W	Efficiency	100.00%
Lamps Flux	1581.97 lm	Maximum value	510.01 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	420 mm	Height	290 mm		
Round Luminous Area		Diam.	420 mm	Height	0 mm		
Horizontal Luminous Area		0.138544 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.033517 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		22-09-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1581.97 lm	


LED Flux=2722,9lm LED Power=25,6W Eff=58% EfcLed=106lm/W EfcLum=51lm/W Ra=90 SDCM=2 L70(6K)=50000h

C.I.E.	74 91 98 92 100	D DIN 5040	A61
F UTE	0.92 B + 0.08 T	B NBN	BZ 2

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.87	1.73	2.60	3.46	4.33	OC	0.87	1.73	2.60	3.46	4.33
OB	0.87	1.73	2.60	3.46	4.33	OD	0.87	1.73	2.60	3.46	4.33

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	806.82	800.56	788.80	736.54	655.88	162.28	130.55	82.20	39.94	9.69
OB	806.82	800.56	788.80	736.54	655.88	162.28	130.55	82.20	39.94	9.69
OC	806.82	800.56	788.80	736.54	655.88	162.28	130.55	82.20	39.94	9.69
OD	806.82	800.56	788.80	736.54	655.88	162.28	130.55	82.20	39.94	9.69

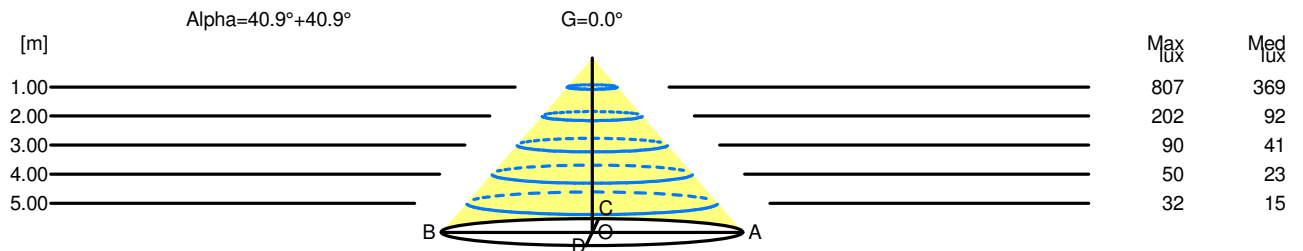

H[m]	D[m]	Max lux	Med lux	Alpha=40.9°+40.9°	G=0.0
1.00	1.73	807	369		
2.00	3.46	202	92		
3.00	5.19	90	41		
4.00	6.93	50	23		
5.00	8.66	32	15		