


## Luminaire

Code 0165010A  
Name COME TOGETHER T BIANCO

## Measurem.

Code FTS1802058  
Name COME TOGETHER T BIANCO

Luminaire Flux	373.63 lm	Luminaire Power	3.60 W	Efficacy	103.79 lm/W	Efficiency	100.00%
Lamps Flux	373.63 lm	Maximum value	333.01 cd/klm	Position	C=0.00 G=180.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 70 mm Diam. 70 mm	Height	270 mm	Height	60 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.003848 m2 0.004200 m2 0.004200 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°			0.004200 m2 0.004200 m2 0.005006 m2		
Coordinate system	CG	Symmetry Type			Rotosymmetrical		
Date	04-10-2018	Maximum Gamma Angle			180		
Measurement Distance	0.00	Measurement Flux			373.63 lm		
LED Flux=439,56lm LED Power=3,6W Eff=85% EfcLed=122lm/W EfcLum=104lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	37 71 91 72 100	D DIN 5040			B21		
F UTE	0.72 G + 0.28 T	B NBN			BZ 6 / 1.5 / BZ 5		

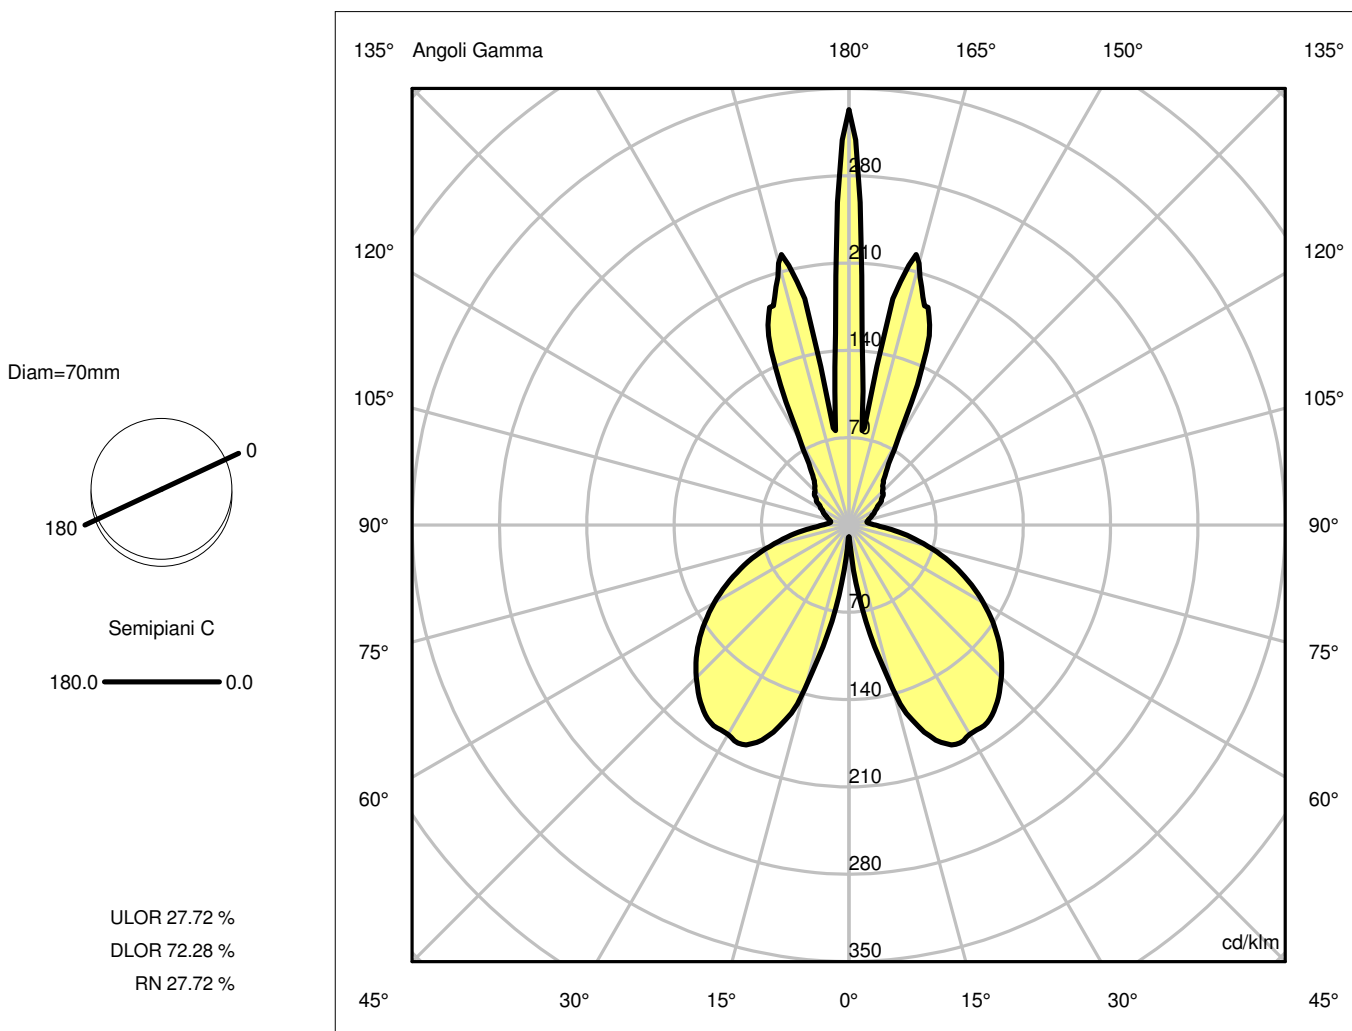

## Luminaire

Code 0165010A  
Name COME TOGETHER T BIANCO

## Measur.


Code FTS1802058  
Name COME TOGETHER T BIANCO

Luminaire Flux	373.63 lm	Luminaire Power	3.60 W	Efficacy	103.79 lm/W	Efficiency	100.00%
Lamps Flux	373.63 lm	Maximum value	333.01 cd/klm	Position	C=0.00 G=180.00	CG	Rotosymmetrical
Round Luminaire		Diam.	70 mm	Height	270 mm		
Round Luminous Area		Diam.	70 mm	Height	60 mm		
Horizontal Luminous Area	0.003848 m2			Emitting area on Plane 180°		0.004200 m2	
Emitting area on Plane 0°	0.004200 m2			Emitting area on Plane 270°		0.004200 m2	
Emitting area on Plane 90°	0.004200 m2			Glare area at 76°		0.005006 m2	
Coordinate system	CG	Symmetry Type		Maximum Gamma Angle		Rotosymmetrical	
Date	04-10-2018	Measurement Flux				180	
Measurement Distance	0.00					373.63 lm	
LED Flux=439,56lm LED Power=3,6W Eff=85% EfcLed=122lm/W EfcLum=104lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	37 71 91 72 100	D DIN 5040		B21			
F UTE	0.72 G + 0.28 T	B NBN		BZ 6 / 1.5 / BZ 5			

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.07	0.13	0.20	0.26	0.33	OC	0.07	0.13	0.20	0.26	0.33
OB	0.07	0.13	0.20	0.26	0.33	OD	0.07	0.13	0.20	0.26	0.33

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	124.42	47.49	81.29	51.59	19.52	14.34	11.24	8.27	6.03	6.26
OB	124.42	47.49	81.29	51.59	19.52	14.34	11.24	8.27	6.03	6.26
OC	124.42	47.49	81.29	51.59	19.52	14.34	11.24	8.27	6.03	6.26
OD	124.42	47.49	81.29	51.59	19.52	14.34	11.24	8.27	6.03	6.26

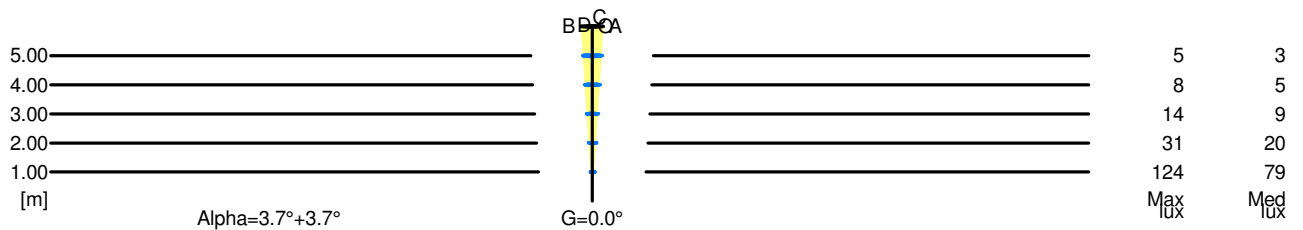

5.00	0.65	5	3	
4.00	0.52	8	5	
3.00	0.39	14	9	
2.00	0.26	31	20	
1.00	0.13	124	79	
H[m]	D[m]	Max lux	Med lux	Alpha=3.7°+3.7° G=0.0