


## Luminaire

Code AN20804  
Name VECTOR 95 TRACK 930 WL DALI NRO

## Measurem.

Code FTS1901113  
Name VECTOR 95 TRACK 930 WL DALI NRO

Luminaire Flux	2661.52 lm	Luminaire Power	30.00 W	Efficacy	88.72 lm/W	Efficiency	100.00%
Lamps Flux	2661.52 lm	Maximum value	1223.92 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	95 mm 75 mm	Height Height	210 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.004418 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.001069 m2	
Coordinate system Date Measurement Distance		CG 27-03-2019 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 2661.52 lm	
LED Flux=3432lm LED Power=27.5W Eff=78% EfcLed=125lm/W EfcLum=89lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	99 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

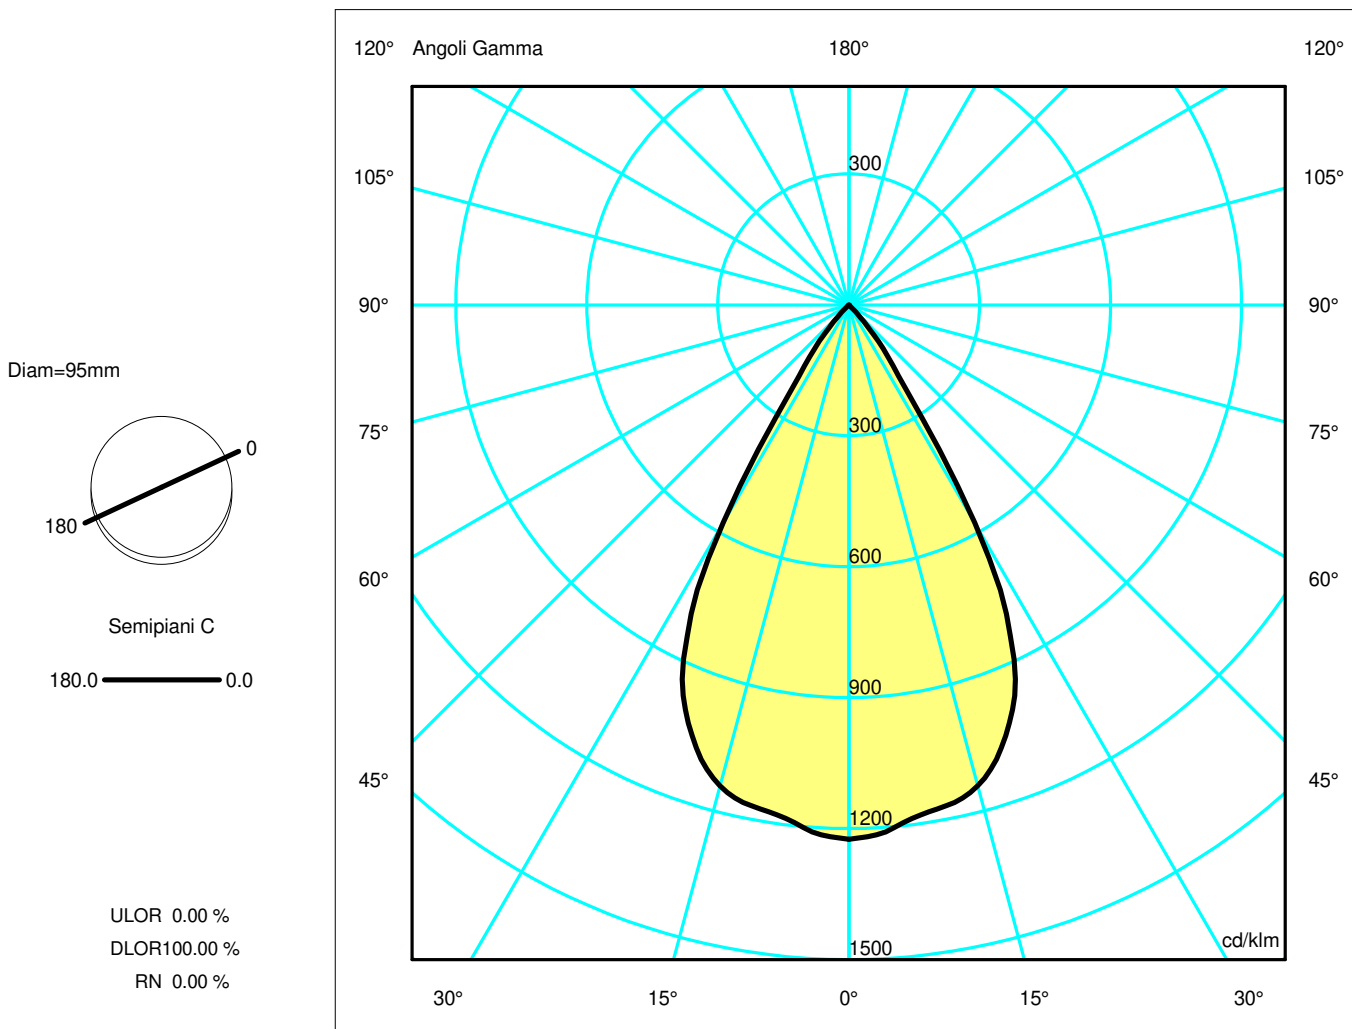

**Luminaire**

Code AN20804  
Name VECTOR 95 TRACK 930 WL DALI NRO

**Measurement**


Code FTS1901113  
Name VECTOR 95 TRACK 930 WL DALI NRO

Luminaire Flux	2661.52 lm	Luminaire Power	30.00 W	Efficacy	88.72 lm/W	Efficiency	100.00%
Lamps Flux	2661.52 lm	Maximum value	1223.92 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	95 mm 75 mm	Height Height	210 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.004418 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.001069 m2	
Coordinate system Date Measurement Distance		CG 27-03-2019 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 2661.52 lm	
LED Flux=3432lm LED Power=27.5W Eff=78% EfcLed=125lm/W EfcLum=89lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	99 --	100 --	100 --	100 --	D DIN 5040 B NBN	A60 BZ 1	

## Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.57	1.14	1.70	2.27	2.84	OC	0.57	1.14	1.70	2.27	2.84
OB	0.57	1.14	1.70	2.27	2.84	OD	0.57	1.14	1.70	2.27	2.84

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3257.49	3197.71	3036.26	2384.62	529.62	28.09	2.97	1.55	1.02	0.51
OB	3257.49	3197.71	3036.26	2384.62	529.62	28.09	2.97	1.55	1.02	0.51
OC	3257.49	3197.71	3036.26	2384.62	529.62	28.09	2.97	1.55	1.02	0.51
OD	3257.49	3197.71	3036.26	2384.62	529.62	28.09	2.97	1.55	1.02	0.51

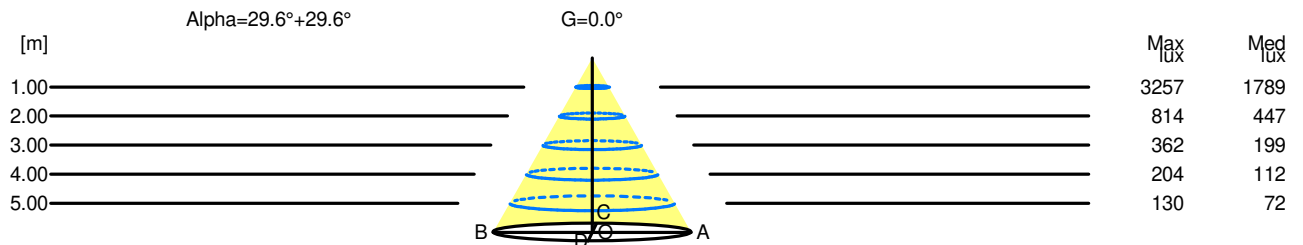

H[m]	D[m]	Max lux	Med lux	Alpha=29.6°+29.6°	G=0.0
1.00	1.14	3257	1789		
2.00	2.27	814	447		
3.00	3.41	362	199		
4.00	4.54	204	112		
5.00	5.68	130	72		