


## Luminaire

Code 1274010A  
Name nh1217 S2 14 - sospensione

## Measurem.

Code FTS1800648  
Name nh1217 S2 14 - sospensione

|                               |                 |                         |               |                             |               |   |                 |
|-------------------------------|-----------------|-------------------------|---------------|-----------------------------|---------------|---|-----------------|
| Luminaire Flux                | 257.26 lm       | Luminaire Power         | 4.00 W        | Efficacy                    | 64.31 lm/W    | Efficiency  | 80.39%          |
| Lamps Flux                    | 320.00 lm       | Maximum value           | 122.51 cd/klm | Position                    | C=0.00 G=1.00 | CG  | Rotosymmetrical |
| Round Luminaire               |                 | Diam.                   | 140 mm        | Height                      | 140 mm        |   |                 |
| Round Luminous Area           |                 | Diam.                   | 140 mm        | Height                      | 140 mm        |   |                 |
| Horizontal Luminous Area      |                 | 0.015394 m <sup>2</sup> |               | Emitting area on Plane 180° |               | 0.019600 m <sup>2</sup>                                 |                 |
| Emitting area on Plane 0°     |                 | 0.019600 m <sup>2</sup> |               | Emitting area on Plane 270° |               | 0.019600 m <sup>2</sup>                                 |                 |
| Emitting area on Plane 90°    |                 | 0.019600 m <sup>2</sup> |               | Glare area at 76°           |               | 0.022742 m <sup>2</sup>                                 |                 |
| Coordinate system             |                 | CG                      |               | Symmetry Type               |               | Rotosymmetrical   |                 |
| Date                          |                 | 10-11-2017              |               | Maximum Gamma Angle         |               | 180   |                 |
| Measurement Distance          |                 | 0.00                    |               | Measurement Flux            |               | 320.00 lm   |                 |
| Greenplux 4W E14 3000K 320 lm |                 |                         |               |                             |               |   |                 |
| C.I.E.                        | 32 59 81 70 80  |                         |               | D DIN 5040                  |               | B21   |                 |
| F UTE                         | 0.56 H + 0.24 T |                         |               | B NBN                       |               | BZ 7 / 0.8 / BZ 6 / 1.25 / BZ 7 / 2.5 / BZ 6 / 3 / BZ 7 |                 |

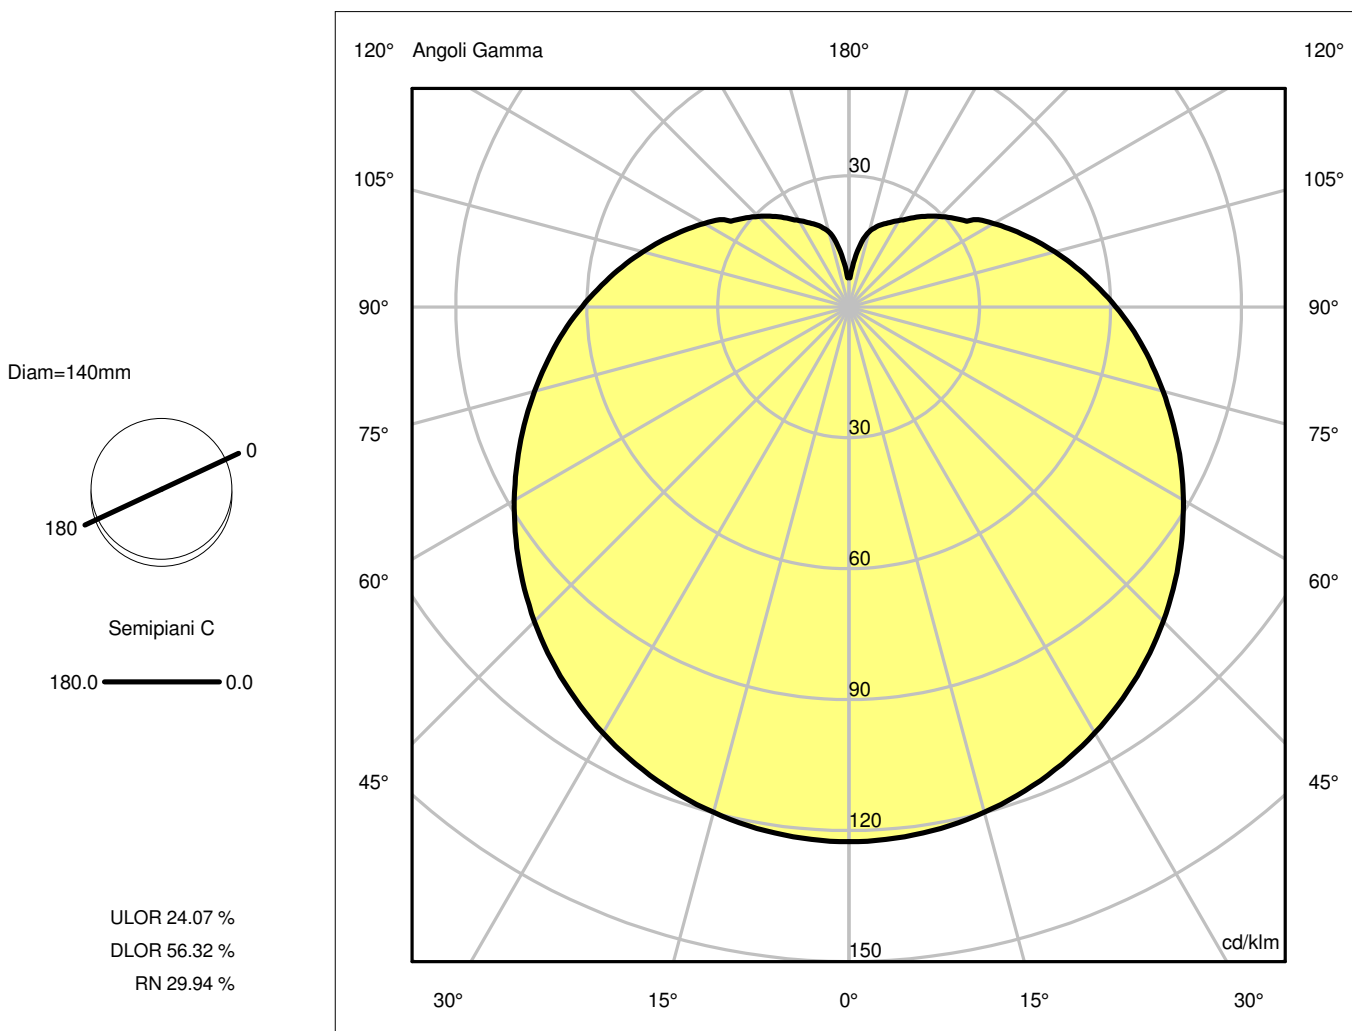

**Luminaire**

Code 1274010A  
Name nh1217 S2 14 - sospensione

**Measur.**

Code FTS1800648  
Name nh1217 S2 14 - sospensione

|                               |                 |                 |               |                             |   |                 |                 |
|-------------------------------|-----------------|-----------------|---------------|-----------------------------|---|-----------------|-----------------|
| Luminaire Flux                | 257.26 lm       | Luminaire Power | 4.00 W        | Efficacy                    | 64.31 lm/W  | Efficiency      | 80.39%          |
| Lamps Flux                    | 320.00 lm       | Maximum value   | 122.51 cd/klm | Position                    | C=0.00 G=1.00   | CG              | Rotosymmetrical |
| Round Luminaire               |                 | Diam.           | 140 mm        | Height                      | 140 mm  |                 |                 |
| Round Luminous Area           |                 | Diam.           | 140 mm        | Height                      | 140 mm  |                 |                 |
| Horizontal Luminous Area      |                 | 0.015394 m2     |               | Emitting area on Plane 180° |   | 0.019600 m2     |                 |
| Emitting area on Plane 0°     |                 | 0.019600 m2     |               | Emitting area on Plane 270° |   | 0.019600 m2     |                 |
| Emitting area on Plane 90°    |                 | 0.019600 m2     |               | Glare area at 76°           |   | 0.022742 m2     |                 |
| Coordinate system             |                 | CG              |               | Symmetry Type               |   | Rotosymmetrical |                 |
| Date                          |                 | 10-11-2017      |               | Maximum Gamma Angle         |   | 180             |                 |
| Measurement Distance          |                 | 0.00            |               | Measurement Flux            |   | 320.00 lm       |                 |
| Greenplux 4W E14 3000K 320 lm |                 |                 |               |                             |   |                 |                 |
| C.I.E.                        | 32 59 81 70 80  |                 |               | D DIN 5040                  | B21   |                 |                 |
| F UTE                         | 0.56 H + 0.24 T |                 |               | B NBN                       | BZ 7 / 0.8 / BZ 6 / 1.25 / BZ 7 / 2.5 / BZ 6 / 3 / BZ 7 |                 |                 |

Apertura troppo larga

Apertura troppo larga