


Luminaire

Code AN20615
Name VECTOR 95 TRACK 930 SP DALI BR.SILVER

Measurem.

Code FTS1901078
Name VECTOR 95 TRACK 930 SP DALI BR.SILVER

Luminaire Flux	2693.78 lm	Luminaire Power	30.00 W	Efficacy	89.79 lm/W	Efficiency	100.00%
Lamps Flux	2693.78 lm	Maximum value	8143.64 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	95 mm 75 mm	Height Height	210 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.004418 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.001069 m2	
Coordinate system Date Measurement Distance		CG 27-03-2019 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 2693.78 lm	
LED Flux=3432lm LED Power=27.5W Eff=78% EfcLed=125lm/W EfcLum=90lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	100 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

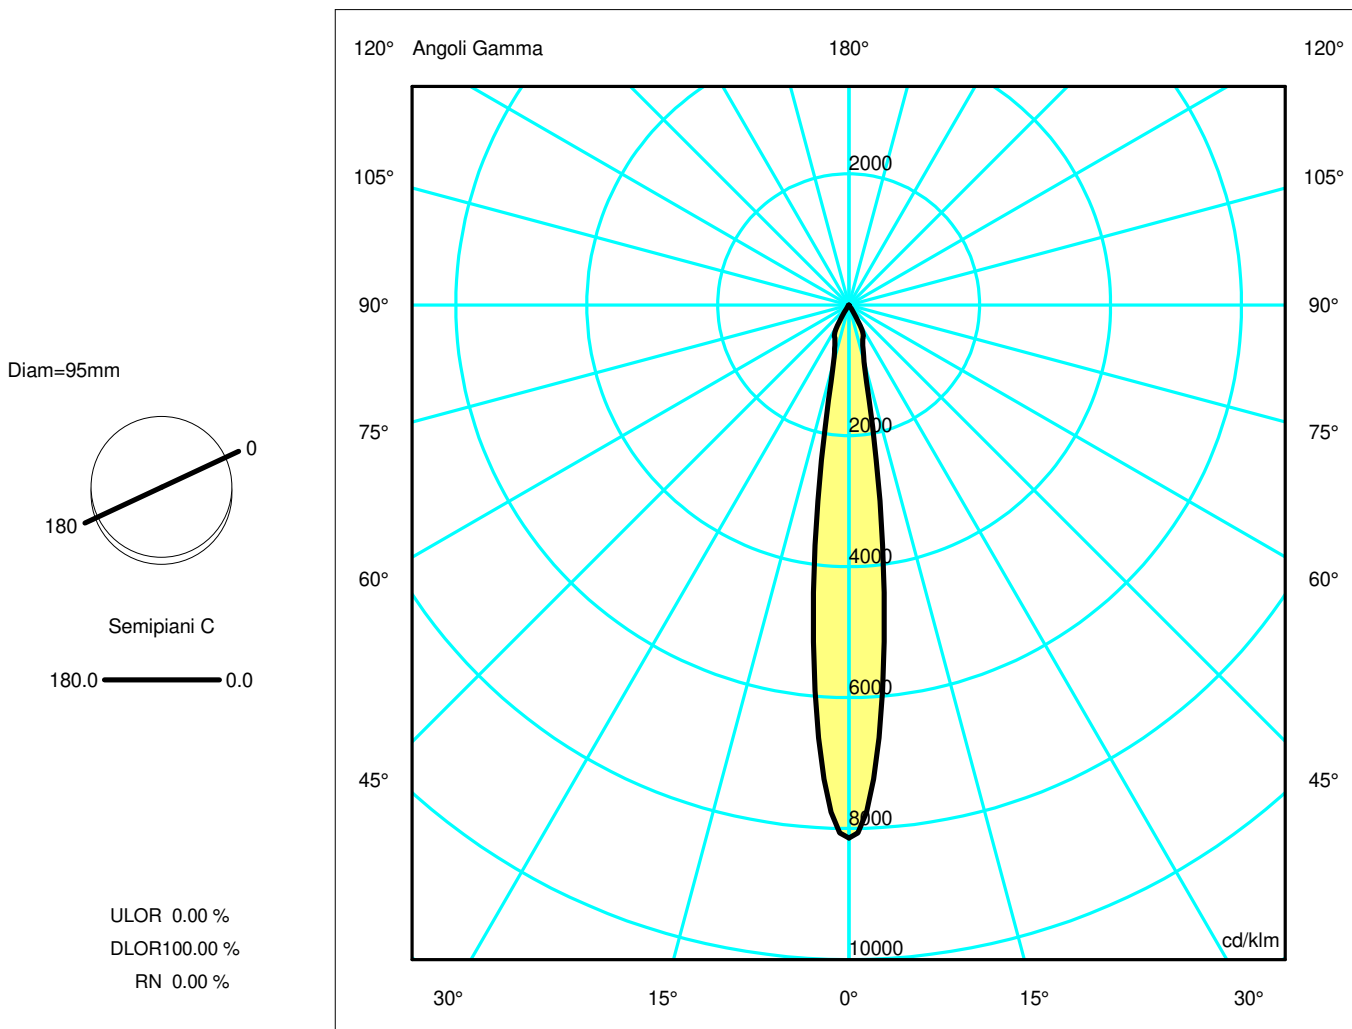

Luminaire

Code AN20615
Name VECTOR 95 TRACK 930 SP DALI BR.SILVER

Measurement


Code FTS1901078
Name VECTOR 95 TRACK 930 SP DALI BR.SILVER

Luminaire Flux	2693.78 lm	Luminaire Power	30.00 W	Efficacy	89.79 lm/W	Efficiency	100.00%
Lamps Flux	2693.78 lm	Maximum value	8143.64 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	95 mm 75 mm	Height Height	210 mm 0 mm		
Horizontal Luminous Area	0.004418 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.001069 m2		
Coordinate system	CG			Symmetry Type	Rotosymmetrical		
Date	27-03-2019			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	2693.78 lm		
LED Flux=3432lm LED Power=27.5W Eff=78% EfcLed=125lm/W EfcLum=90lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	100 100 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.13	0.26	0.39	0.53	0.66	OC	0.13	0.26	0.39	0.53	0.66
OB	0.13	0.26	0.39	0.53	0.66	OD	0.13	0.26	0.39	0.53	0.66

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	21937.18	15934.79	2414.77	1406.72	41.57	6.07	2.48	1.52	0.88	0.46
OB	21937.18	15934.79	2414.77	1406.72	41.57	6.07	2.48	1.52	0.88	0.46
OC	21937.18	15934.79	2414.77	1406.72	41.57	6.07	2.48	1.52	0.88	0.46
OD	21937.18	15934.79	2414.77	1406.72	41.57	6.07	2.48	1.52	0.88	0.46

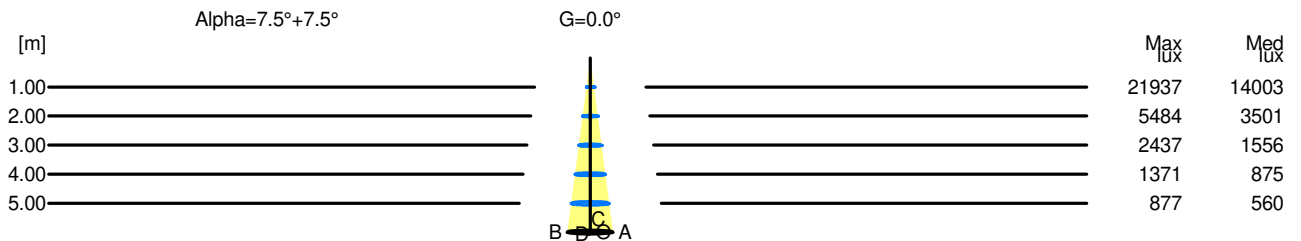

H[m]	D[m]	Max lux	Med lux	Alpha=7.5°+7.5°	G=0.0
1.00	0.26	21937	14003		
2.00	0.53	5484	3501		
3.00	0.79	2437	1556		
4.00	1.05	1371	875		
5.00	1.32	877	560		