


Luminaire

Code AN30604
Name VECTOR 95 TRACK 930 SP DALI EUTRAC NRO

Measurem.

Code FTS1901131
Name VECTOR 95 TRACK 930 SP DALI EUTRAC NRO

Luminaire Flux	2693.78 lm	Luminaire Power	30.00 W	Efficacy	89.79 lm/W	Efficiency	100.00%
Lamps Flux	2693.78 lm	Maximum value	8143.64 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	95 mm 75 mm	Height Height	210 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.004418 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.001069 m2	
Coordinate system Date Measurement Distance		CG 27-03-2019 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 2693.78 lm	
LED Flux=3432lm LED Power=27.5W Eff=78% EfcLed=125lm/W EfcLum=90lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	100 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

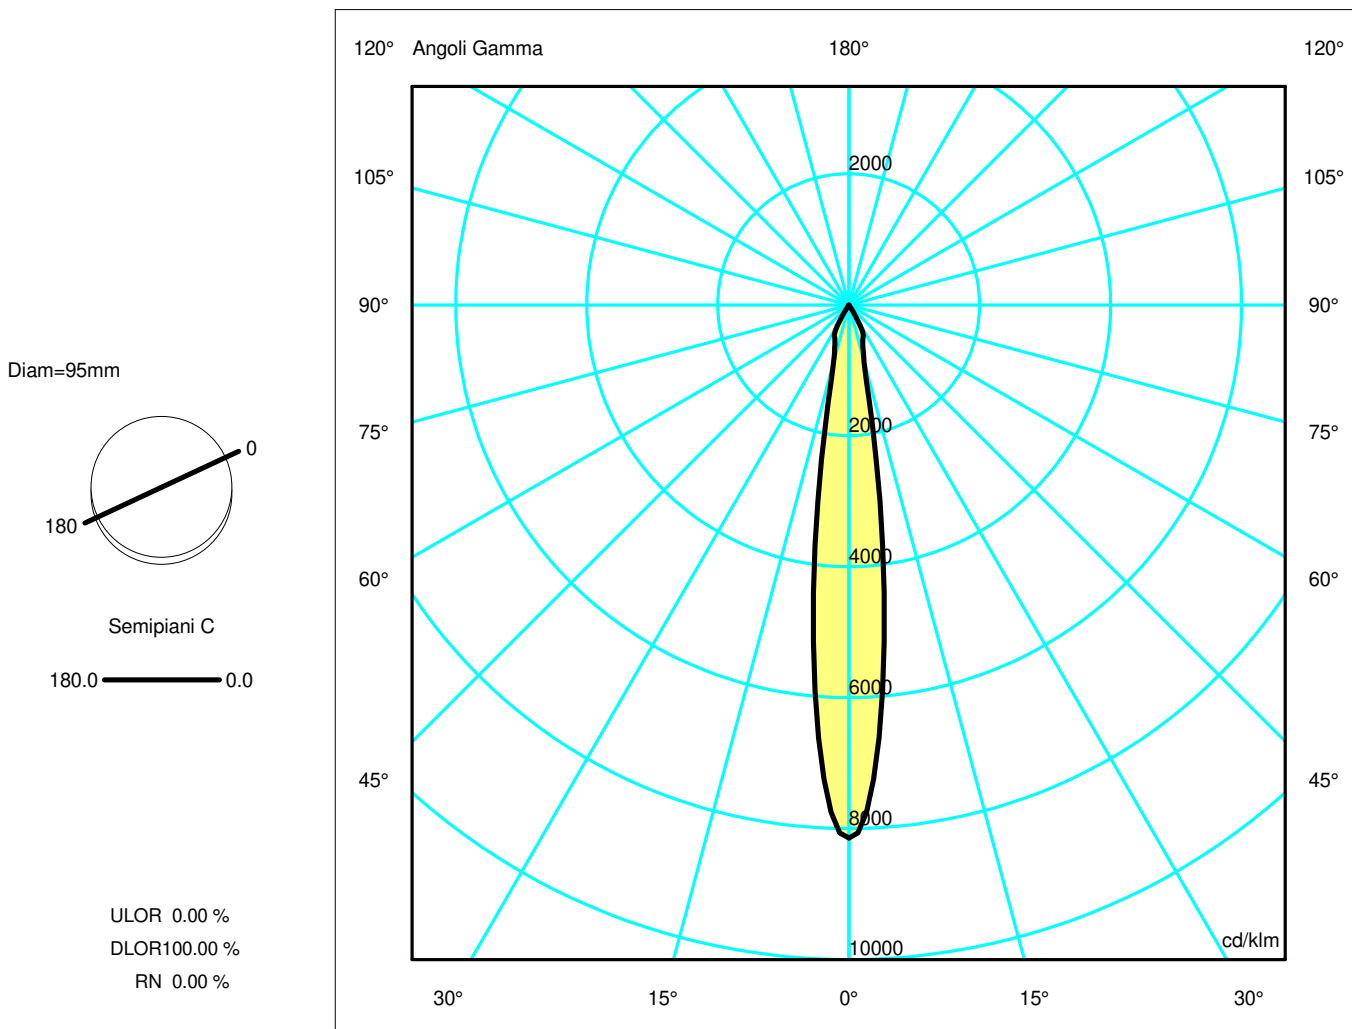

Luminaire

Code AN30604
Name VECTOR 95 TRACK 930 SP DALI EUTRAC NRO

Measurement


Code FTS1901131
Name VECTOR 95 TRACK 930 SP DALI EUTRAC NRO

Luminaire Flux	2693.78 lm	Luminaire Power	30.00 W	Efficacy	89.79 lm/W	Efficiency	100.00%
Lamps Flux	2693.78 lm	Maximum value	8143.64 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	95 mm 75 mm	Height Height	210 mm 0 mm		
Horizontal Luminous Area	0.004418 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.001069 m2		
Coordinate system	CG			Symmetry Type	Rotosymmetrical		
Date	27-03-2019			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	2693.78 lm		
LED Flux=3432lm LED Power=27.5W Eff=78% EfcLed=125lm/W EfcLum=90lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	100 100 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.13	0.26	0.39	0.53	0.66	OC	0.13	0.26	0.39	0.53	0.66
OB	0.13	0.26	0.39	0.53	0.66	OD	0.13	0.26	0.39	0.53	0.66

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	21937.18	15934.79	2414.77	1406.72	41.57	6.07	2.48	1.52	0.88	0.46
OB	21937.18	15934.79	2414.77	1406.72	41.57	6.07	2.48	1.52	0.88	0.46
OC	21937.18	15934.79	2414.77	1406.72	41.57	6.07	2.48	1.52	0.88	0.46
OD	21937.18	15934.79	2414.77	1406.72	41.57	6.07	2.48	1.52	0.88	0.46

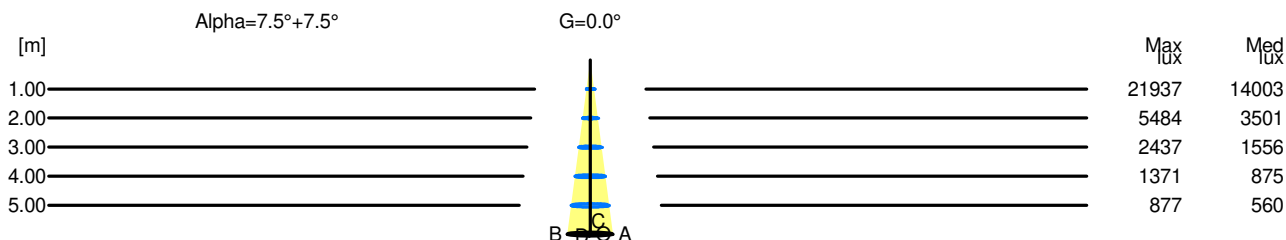

H[m]	D[m]	Max lux	Med lux	Alpha=7.5°+7.5°	G=0.0
1.00	0.26	21937	14003		
2.00	0.53	5484	3501		
3.00	0.79	2437	1556		
4.00	1.05	1371	875		
5.00	1.32	877	560		