


Luminaire

Code AN11815
Name VECTOR 55 TRACK 927 WF DALI BR.SILVER

Measur.

Code FTS1801624
Name VECTOR 55 TRACK 927 WF DALI BR.SILVER

| | | | | | | | |
|--|--------------------|------------------|----------------|-----------------------------|---------------|------------|-----------------|
| Luminaire Flux | 1534.07 lm | Luminaire Power | 25.00 W | Efficacy | 61.36 lm/W | Efficiency | 100.00% |
| Lamps Flux | 1534.07 lm | Maximum value | 3174.36 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 55 mm | Height | 135 mm | | |
| Round Luminous Area | | Diam. | 45 mm | Height | 0 mm | | |
| Horizontal Luminous Area | 0.001590 m2 | | | Emitting area on Plane 180° | 0.000000 m2 | | |
| Emitting area on Plane 0° | 0.000000 m2 | | | Emitting area on Plane 270° | 0.000000 m2 | | |
| Emitting area on Plane 90° | 0.000000 m2 | | | Glare area at 76° | 0.000385 m2 | | |
| Coordinate system | CG | Symmetry Type | | Maximum Gamma Angle | 180 | | Rotosymmetrical |
| Date | 06-12-2017 | Measurement Flux | | | 1534.07 lm | | |
| Measurement Distance | 0.00 | | | | | | |
| LED Flux=2254lm LED Power=21W Eff=68% EfcLed=107lm/W EfcLum=61lm/W CCT=2700K Ra=90 SDCM=3 L70(6K)=50000h | | | | | | | |
| C.I.E. | 99 100 100 100 100 | D DIN 5040 | | A60 | | | |
| F UTE | -- | B NBN | | BZ 1 | | | |

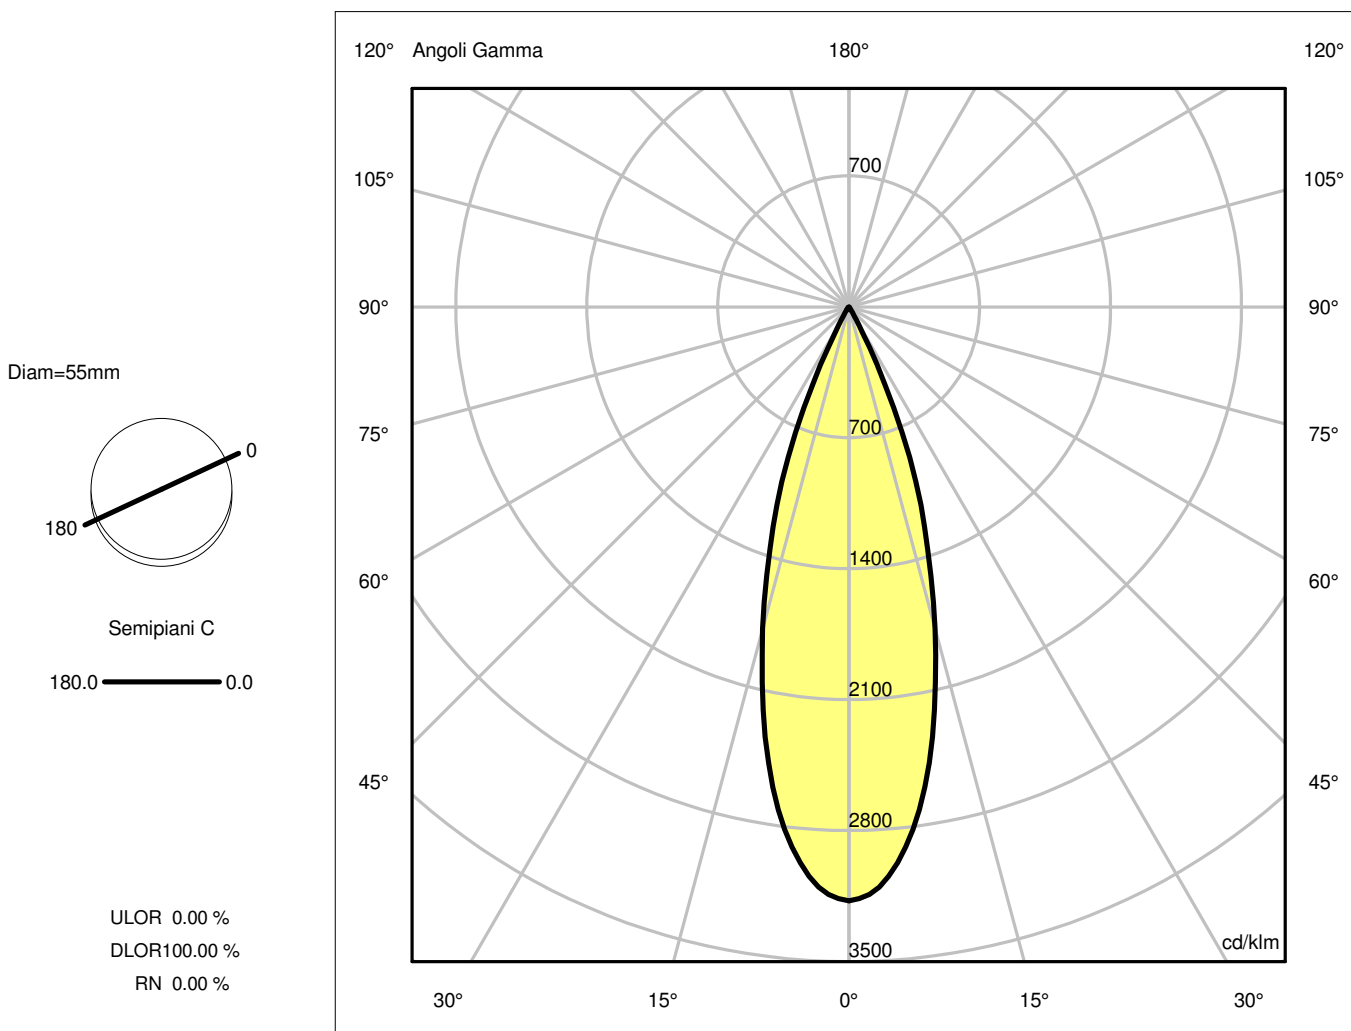

Luminaire

Code AN11815
Name VECTOR 55 TRACK 927 WF DALI BR.SILVER

Measurement


Code FTS1801624
Name VECTOR 55 TRACK 927 WF DALI BR.SILVER

| | | | | | | | |
|--|--------------------|------------------|----------------|-----------------------------|---------------|------------|-----------------|
| Luminaire Flux | 1534.07 lm | Luminaire Power | 25.00 W | Efficacy | 61.36 lm/W | Efficiency | 100.00% |
| Lamps Flux | 1534.07 lm | Maximum value | 3174.36 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 55 mm | Height | 135 mm | | |
| Round Luminous Area | | Diam. | 45 mm | Height | 0 mm | | |
| Horizontal Luminous Area | 0.001590 m2 | | | Emitting area on Plane 180° | 0.000000 m2 | | |
| Emitting area on Plane 0° | 0.000000 m2 | | | Emitting area on Plane 270° | 0.000000 m2 | | |
| Emitting area on Plane 90° | 0.000000 m2 | | | Glare area at 76° | 0.000385 m2 | | |
| Coordinate system | CG | Symmetry Type | | Maximum Gamma Angle | 180 | | Rotosymmetrical |
| Date | 06-12-2017 | Measurement Flux | | | 1534.07 lm | | |
| Measurement Distance | 0.00 | | | | | | |
| LED Flux=2254lm LED Power=21W Eff=68% EfcLed=107lm/W EfcLum=61lm/W CCT=2700K Ra=90 SDCM=3 L70(6K)=50000h | | | | | | | |
| C.I.E. | 99 100 100 100 100 | D DIN 5040 | | A60 | | | |
| F UTE | -- | B NBN | | BZ 1 | | | |

Width at 50.00 % of Max Intensity

| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| OA | 0.29 | 0.59 | 0.88 | 1.18 | 1.47 | OC | 0.29 | 0.59 | 0.88 | 1.18 | 1.47 |
| OB | 0.29 | 0.59 | 0.88 | 1.18 | 1.47 | OD | 0.29 | 0.59 | 0.88 | 1.18 | 1.47 |

| | Luminous Intensities [cd/klm] | | | | | | | | | |
|----|--------------------------------|---------|---------|--------|-------|------|------|------|------|------|
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 4869.69 | 4576.08 | 2731.59 | 706.95 | 28.45 | 5.07 | 2.41 | 1.76 | 1.27 | 0.51 |
| OB | 4869.69 | 4576.08 | 2731.59 | 706.95 | 28.45 | 5.07 | 2.41 | 1.76 | 1.27 | 0.51 |
| OC | 4869.69 | 4576.08 | 2731.59 | 706.95 | 28.45 | 5.07 | 2.41 | 1.76 | 1.27 | 0.51 |
| OD | 4869.69 | 4576.08 | 2731.59 | 706.95 | 28.45 | 5.07 | 2.41 | 1.76 | 1.27 | 0.51 |

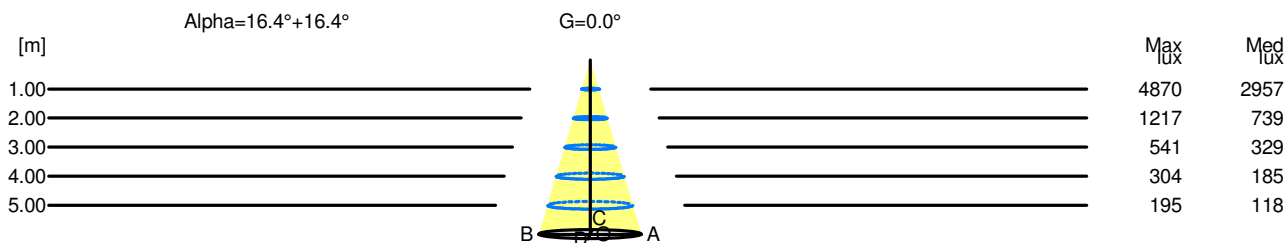

| H[m] | D[m] | Max lux | Med lux | Alpha=16.4°+16.4° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.59 | 4870 | 2957 | | |
| 2.00 | 1.18 | 1217 | 739 | | |
| 3.00 | 1.77 | 541 | 329 | | |
| 4.00 | 2.35 | 304 | 185 | | |
| 5.00 | 2.94 | 195 | 118 | | |