

**Luminaire**


Code AP11404\_MIN  
 Name VECTOR 55 MAGNET ZOOM 927 DALI NRO - MIN

**Measurem.**

Code FTS1801636  
 Name VECTOR 55 MAGNET ZOOM 927 DALI NRO - MIN

Luminaire Flux	633.84 lm	Luminaire Power	23.00 W	Efficacy	27.56 lm/W	Efficiency	100.00%
Lamps Flux	633.84 lm	Maximum value	5139.89 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 55 mm Diam. 44 mm	Height	130 mm	Height	0 mm		
Horizontal Luminous Area	0.001521 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 90°	0.000000 m2	Glare area at 76°	0.000368 m2		
Coordinate system	CG	Symmetry Type	180	Rotosymmetrical			
Date	09-02-2018	Maximum Gamma Angle	180	180			
Measurement Distance	0.00	Measurement Flux	633.84 lm	633.84 lm			
LED Flux=2044lm LED Power=20W Eff=31% EfcLed=102lm/W EfcLum=28lm/W CCT=2700K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	96 99 100 100 100	D DIN 5040	A60				
F UTE	1.00 A	B NBN	BZ 1				


Diam=55mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

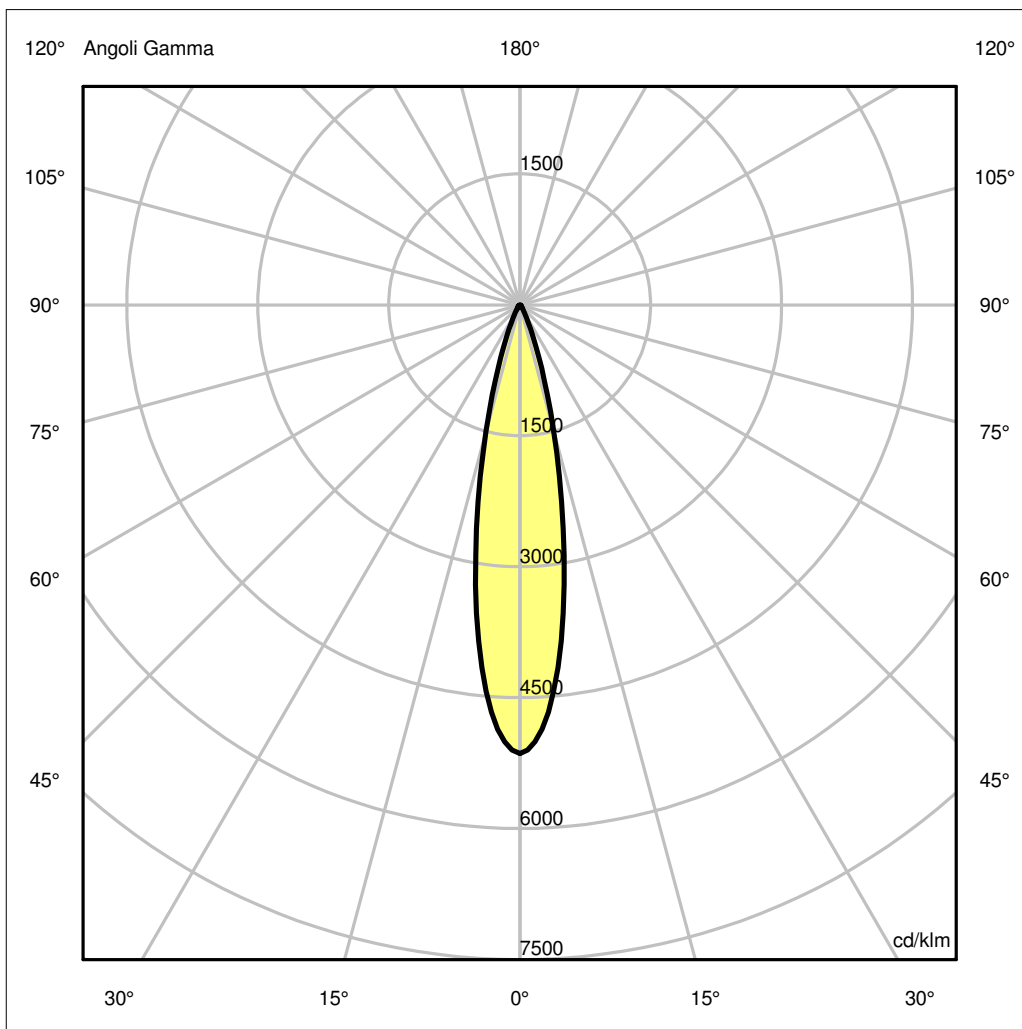

## Luminaire

Code AP11404\_MIN  
Name VECTOR 55 MAGNET ZOOM 927 DALI NRO - MIN

## Measur.

Code FTS1801636  
Name VECTOR 55 MAGNET ZOOM 927 DALI NRO - MIN


Luminaire Flux	633.84 lm	Luminaire Power	23.00 W	Efficacy	27.56 lm/W	Efficiency	100.00%
Lamps Flux	633.84 lm	Maximum value	5139.89 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	130 mm		
Round Luminous Area		Diam.	44 mm	Height	0 mm		
Horizontal Luminous Area		0.001521 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000368 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		09-02-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		633.84 lm	
LED Flux=2044lm LED Power=20W Eff=31% EfcLed=102lm/W EfcLum=28lm/W CCT=2700K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	96 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.20	0.39	0.59	0.79	0.98	OC	0.20	0.39	0.59	0.79	0.98
OB	0.20	0.39	0.59	0.79	0.98	OD	0.20	0.39	0.59	0.79	0.98

### Luminous Intensities [ cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	3257.87	2815.64	946.66	157.29	33.78	16.57	10.09	5.16	1.70	0.11
OB	3257.87	2815.64	946.66	157.29	33.78	16.57	10.09	5.16	1.70	0.11
OC	3257.87	2815.64	946.66	157.29	33.78	16.57	10.09	5.16	1.70	0.11
OD	3257.87	2815.64	946.66	157.29	33.78	16.57	10.09	5.16	1.70	0.11

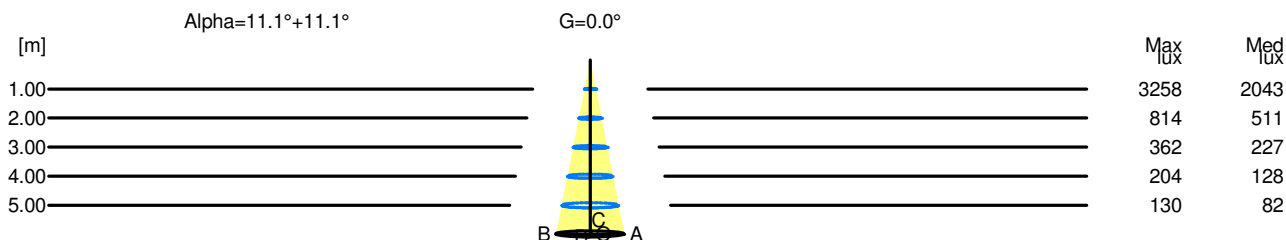

H[m]	D[m]	Max lux	Med lux	Alpha=11.1°+11.1°	G=0.0
1.00	0.39	3258	2043		
2.00	0.79	814	511		
3.00	1.18	362	227		
4.00	1.57	204	128		
5.00	1.97	130	82		