

## Luminaire

Code BH12505+BH16001  
 Name A.39 SHARP D+IND 1184 LB 34 400K ND SIL + COVER 2X4 OPT. LB WHITE

## Measurem.


Code FTS1900351  
 Name A.39 SHARP D+IND 1184 LB 34 400K ND SIL + COVER 2X4 OPT. LB WHITE

Luminaire Flux	4739.10 lm	Luminaire Power	53.00 W	Efficacy	89.42 lm/W	Efficiency	100.00%
Lamps Flux	4739.10 lm	Maximum value	895.39 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	296 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area	0.010952 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.002650 m2		
Coordinate system	CG			Symmetry Type	Double Symmetrical		
Date	16-02-2017			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	4739.10 lm		


LED Flux=5957,9lm LED Power=44W Eff=80% EfcLed=135lm/W EfcLum=89lm/W Ra=90 SDCM=2 L90(20K)=118000h

C.I.E. 97 99 100 35 100  
 F UTE --

D DIN 5040  
 B NBN  
 D62  
 BZ 1



ULOR 65.17 %  
 DLOR 34.83 %  
 RN 65.17 %

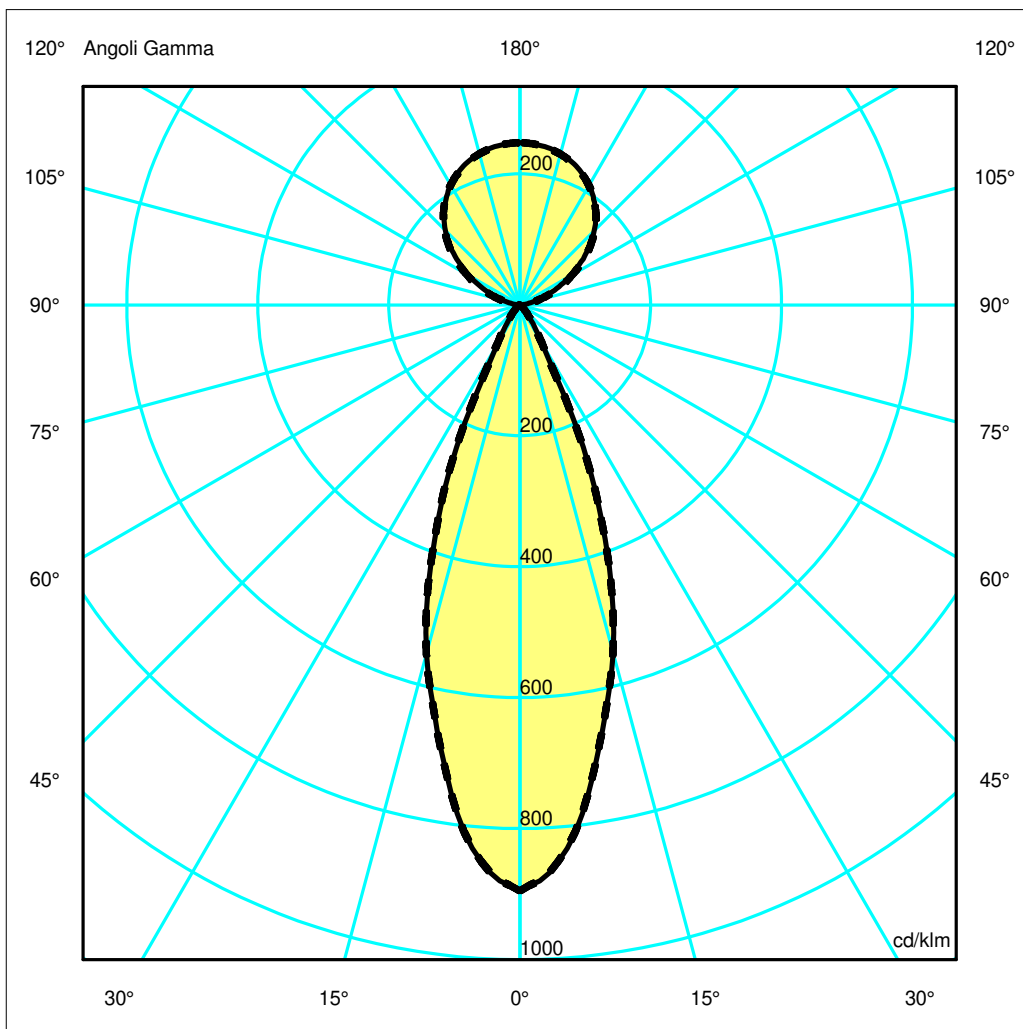

## Luminaire

Code BH12505+BH16001  
Name A.39 SHARP D+IND 1184 LB 34 400K ND SIL + COVER 2X4 OPT. LB WHITE

## Measur.


Code FTS1900351  
Name A.39 SHARP D+IND 1184 LB 34 400K ND SIL + COVER 2X4 OPT. LB WHITE

Luminaire Flux	4739.10 lm	Luminaire Power	53.00 W	Efficacy	89.42 lm/W	Efficiency	100.00%
Lamps Flux	4739.10 lm	Maximum value	895.39 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	296 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.010952 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002650 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		16-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4739.10 lm	
LED Flux=5957,9lm LED Power=44W Eff=80% EfcLed=135lm/W EfcLum=89lm/W Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	97 99 100 35 100			D DIN 5040		D62	
F UTE	--			B NBN		BZ 1	

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.33	0.66	0.98	1.31	1.64	OC	0.33	0.66	0.98	1.31	1.64
OB	0.33	0.66	0.98	1.31	1.64	OD	0.33	0.66	0.98	1.31	1.64

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	4243.33	3947.09	2610.75	938.94	165.69	39.08	10.14	5.48	3.54	1.39
OB	4243.33	3947.09	2610.75	938.94	165.69	39.08	10.14	5.48	3.54	1.39
OC	4243.33	3947.09	2610.75	938.94	165.69	39.08	10.14	5.48	3.54	1.39
OD	4243.33	3947.09	2610.75	938.94	165.69	39.08	10.14	5.48	3.54	1.39

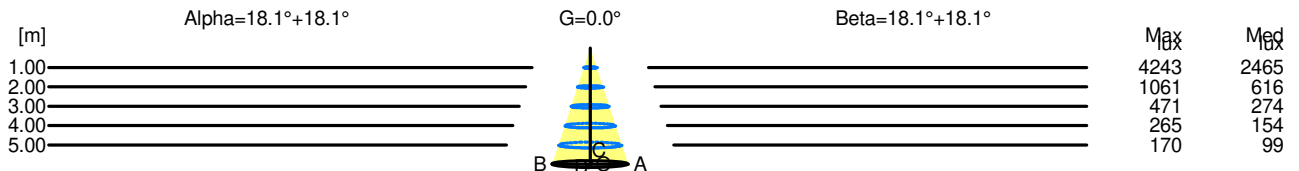

H[m]	D[m]	Max lux	Med lux	Alpha=18.1°+18.1°	G=0.0
1.00	0.66	4243	2465		
2.00	1.31	1061	616		
3.00	1.97	471	274		
4.00	2.62	265	154		
5.00	3.28	170	99		

H[m]	D[m]	Max lux	Med lux	Beta=18.1°+18.1°	G=0.0
1.00	0.66	4243	2465		
2.00	1.31	1061	616		
3.00	1.97	471	274		
4.00	2.62	265	154		
5.00	3.28	170	99		