

## Luminaire

Code BH14504+BH16201  
 Name A.39 SHARP D+IND 2368 LB 34 400K ND NRO + COVER 4X4 OPT. LB WHITE

## Measurem.

Code FTS1900494  
 Name A.39 SHARP D+IND 2368 LB 34 400K ND NRO + COVER 4X4 OPT. LB WHITE

Luminaire Flux	9478.20 lm	Luminaire Power	104.00 W	Efficacy	91.14 lm/W	Efficiency	100.00%
Lamps Flux	9478.20 lm	Maximum value	895.39 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	592 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area	0.021904 m2	Emitting area on Plane 180°		Emitting area on Plane 270°		Emitting area on Plane 90°	
Emitting area on Plane 0°	0.000000 m2	Glare area at 76°					
Emitting area on Plane 90°	0.000000 m2						
Coordinate system	CG	Symmetry Type		Maximum Gamma Angle		Measurement Flux	
Date	16-02-2017	Measurement Flux					
Measurement Distance	0.00						

LED Flux=11915,8lm LED Power=95W Eff=80% EfcLed=125lm/W EfcLum=91lm/W Ra=90 SDCM=2 L90(20K)=118000h

C.I.E. 97 99 100 35 100  
 F UTE --

D DIN 5040  
 B NBN

D62  
 BZ 1


2368mm x 40mm



Semipiani C

180.0 ——— 0.0  
 270.0 - - - - 90.0

ULOR 65.17 %  
 DLOR 34.83 %  
 RN 65.17 %

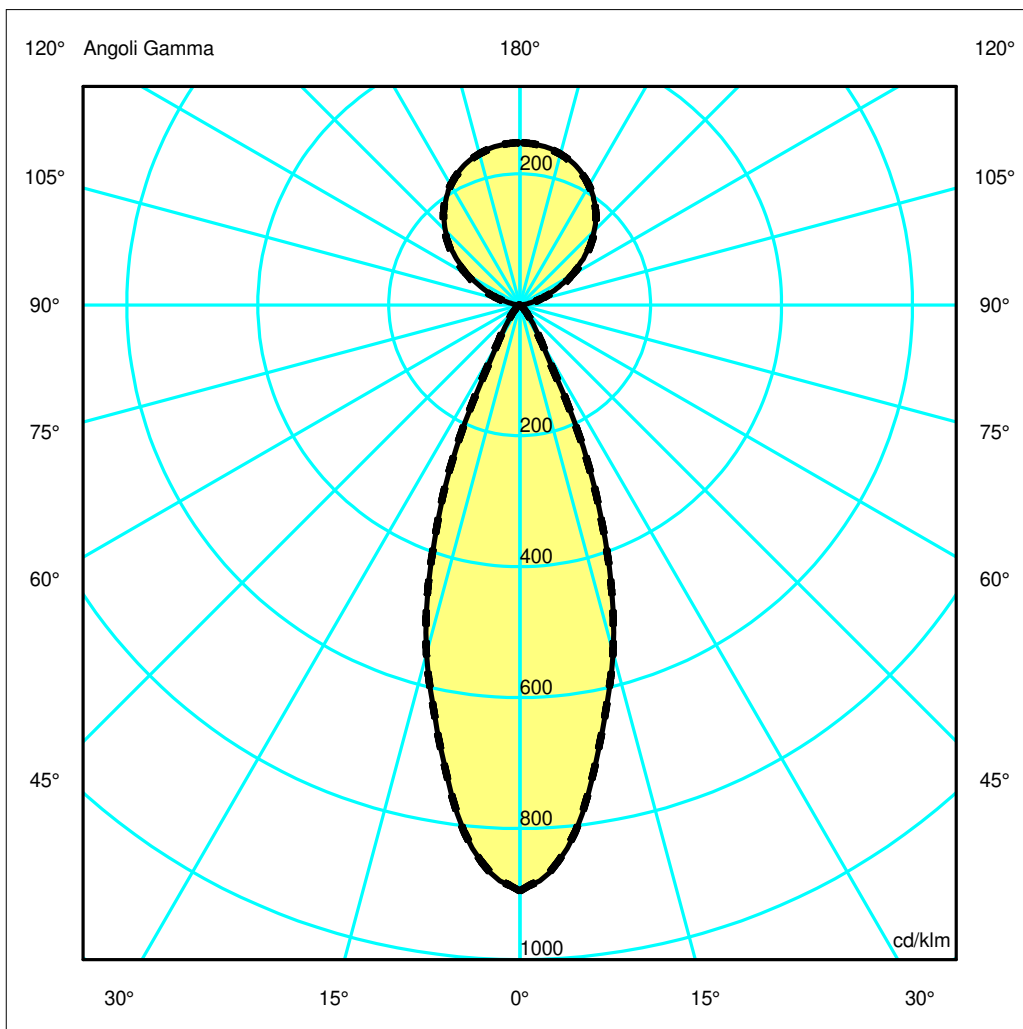

## Luminaire

Code BH14504+BH16201  
Name A.39 SHARP D+IND 2368 LB 34 400K ND NRO + COVER 4X4 OPT. LB WHITE

## Measurment.


Code FTS1900494  
Name A.39 SHARP D+IND 2368 LB 34 400K ND NRO + COVER 4X4 OPT. LB WHITE

Luminaire Flux	9478.20 lm	Luminaire Power	104.00 W	Efficacy	91.14 lm/W	Efficiency	100.00%
Lamps Flux	9478.20 lm	Maximum value	895.39 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	592 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.021904 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.005299 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		16-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		9478.20 lm	
LED Flux=11915,8lm LED Power=95W Eff=80% EfcLed=125lm/W EfcLum=91lm/W Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	97 99 100 35 100			D DIN 5040		D62	
F UTE	--			B NBN		BZ 1	

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.33	0.66	0.98	1.31	1.64	OC	0.33	0.66	0.98	1.31	1.64
OB	0.33	0.66	0.98	1.31	1.64	OD	0.33	0.66	0.98	1.31	1.64

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	8486.66	7894.17	5221.51	1877.88	331.37	78.17	20.28	10.96	7.09	2.77
OB	8486.66	7894.17	5221.51	1877.88	331.37	78.17	20.28	10.96	7.09	2.77
OC	8486.66	7894.17	5221.51	1877.88	331.37	78.17	20.28	10.96	7.09	2.77
OD	8486.66	7894.17	5221.51	1877.88	331.37	78.17	20.28	10.96	7.09	2.77

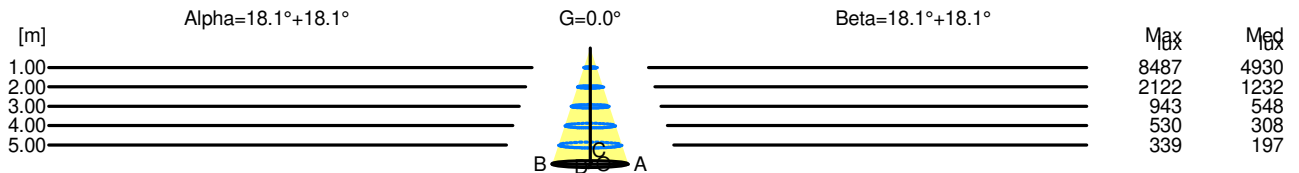

H[m]	D[m]	Max lux	Med lux	Alpha=18.1°+18.1°	G=0.0
1.00	0.66	8487	4930		
2.00	1.31	2122	1232		
3.00	1.97	943	548		
4.00	2.62	530	308		
5.00	3.28	339	197		

H[m]	D[m]	Max lux	Med lux	Beta=18.1°+18.1°	G=0.0
1.00	0.66	8487	4930		
2.00	1.31	2122	1232		
3.00	1.97	943	548		
4.00	2.62	530	308		
5.00	3.28	339	197		