

## Luminaire

Code BH10405+BH16301  
 Name A.39 SHARP D+IND 2368 HB 34 300K ND SIL + COVER 6X4 OPT. HB WHITE

## Measurem.

Code FTS1900549  
 Name A.39 SHARP D+IND 2368 HB 34 300K ND SIL + COVER 6X4 OPT. HB WHITE

Luminaire Flux	10539.40 lm	Luminaire Power	125.00 W	Efficacy	84.32 lm/W	Efficiency	100.00%
Lamps Flux	10539.40 lm	Maximum value	1128.65 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	888 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.032856 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.007949 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		16-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		10539.40 lm	

LED Flux=13475,65lm LED Power=103W Eff=78% EfcLed=131lm/W EfcLum=84lm/W Ra=90 SDCM=2 L90(20K)=118000h

C.I.E. 97 99 100 44 100  
 F UTE --

D DIN 5040  
 B NBN

C62  
 BZ 1


2368mm x 40mm



Semipiani C

180.0 ——— 0.0  
 270.0 - - - - 90.0

ULOR 56.09 %  
 DLOR 43.91 %  
 RN 56.09 %

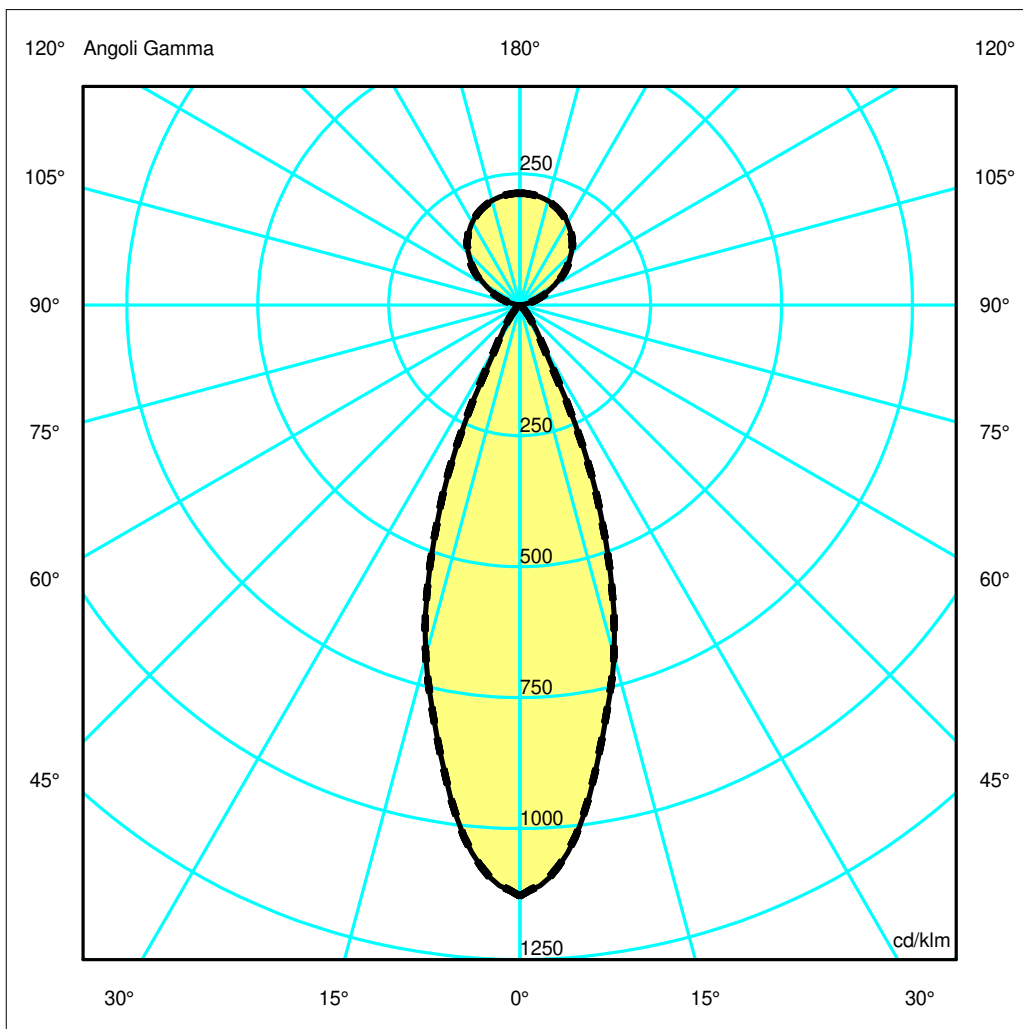

## Luminaire

Code BH10405+BH16301  
Name A.39 SHARP D+IND 2368 HB 34 300K ND SIL + COVER 6X4 OPT. HB WHITE

## Measurerm.


Code FTS1900549  
Name A.39 SHARP D+IND 2368 HB 34 300K ND SIL + COVER 6X4 OPT. HB WHITE

Luminaire Flux	10539.40 lm	Luminaire Power	125.00 W	Efficacy	84.32 lm/W	Efficiency	100.00%
Lamps Flux	10539.40 lm	Maximum value	1128.65 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire Rectangular Luminous Area	Length Length	2368 mm 888 mm	Width Width	40 mm 37 mm	Height Height	111 mm 0 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.032856 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.007949 m2				
Coordinate system Date Measurement Distance	CG 16-02-2017 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Double Symmetrical 180 10539.40 lm				
LED Flux=13475,65lm LED Power=103W Eff=78% EfcLed=131lm/W EfcLum=84lm/W Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E. F UTE	97 99 100 44 100 --	D DIN 5040 B NBN	C62 BZ 1				

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.33	0.66	0.98	1.31	1.64	OC	0.33	0.66	0.98	1.31	1.64
OB	0.33	0.66	0.98	1.31	1.64	OD	0.33	0.66	0.98	1.31	1.64

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	11895.25	11064.79	7318.68	2632.11	464.46	109.56	28.43	15.36	9.93	3.89
OB	11895.25	11064.79	7318.68	2632.11	464.46	109.56	28.43	15.36	9.93	3.89
OC	11895.25	11064.79	7318.68	2632.11	464.46	109.56	28.43	15.36	9.93	3.89
OD	11895.25	11064.79	7318.68	2632.11	464.46	109.56	28.43	15.36	9.93	3.89

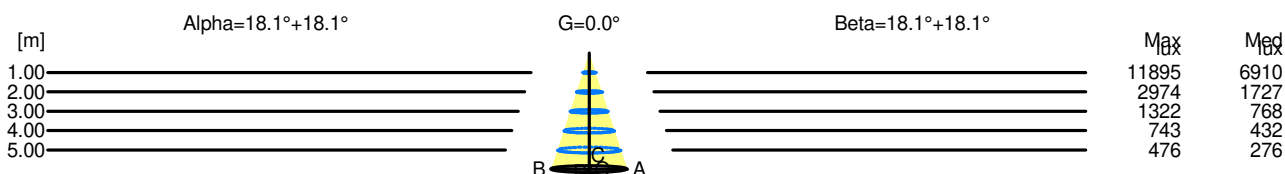

H[m]	D[m]	Max lux	Med lux	Alpha=18.1°+18.1°	G=0.0
1.00	0.66	11895	6910		
2.00	1.31	2974	1727		
3.00	1.97	1322	768		
4.00	2.62	743	432		
5.00	3.28	476	276		

H[m]	D[m]	Max lux	Med lux	Beta=18.1°+18.1°	G=0.0
1.00	0.66	11895	6910		
2.00	1.31	2974	1727		
3.00	1.97	1322	768		
4.00	2.62	743	432		
5.00	3.28	476	276		